Features
- Designed in collaboration with Studio McGee
- Set includes cabinet, precut quartz vanity top, backsplash, sink, cabinet hardware
- Full-extension 17" (432 mm) drawers with soft-close undermount slides
- Removable dividers in top drawers to personalize drawer organization
- Three-way adjustable slow-close door hinges for easy cabinet access
- 20-7/16" (519 mm) cabinet interior provides ample storage space
- Finish-matched cabinet interior offers generous clearance for plumbing
- Vanity top has single faucet hole; requires deck-mount faucet (sold separately)
- Vibrant® Brushed Brass hardware included on White Oak vanities and Vibrant Polished Nickel hardware on White vanities. Additional hardware finishes available (sold separately)
- Coordinating side splashes available (sold separately)

Material
- Quartz vanity top adds beauty and long-lasting durability
- Vitreous china sink
- Solid and composite wood

Installation
- Easy installation – no special tools required
- Sink preinstalled on vanity top to simplify installation

Codes/Standards
ASME A112.19.2/CSA B45.1

KOHLER® One-Year Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	SWK	White Oak

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
10-27-2023 22:16 - US/CA/MX

THE BOLD LOOK OF KOHLER®

12-1/2"
(318 mm)

2-1/2"
(64 mm)

8-11/16"
(221 mm)

100°

Door

24-5/8"
(625 mm)

25"
(635 mm)

20-9/16"
(522 mm)

**General
Rough-In
Area**

39-11/16"
(1008 mm)

17-3/4"
(451 mm)

11-9/16"
(294 mm)

22-5/16"
(567 mm)

22-7/16"
(570 mm)

1-3/16"
(30 mm)

4"
(102 mm)

8-11/16"
(221 mm)

19-7/16"
(494 mm)

5"
(127 mm)
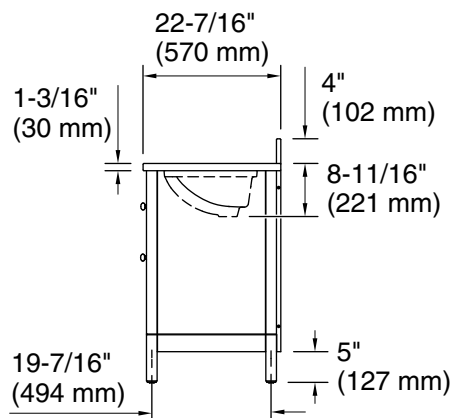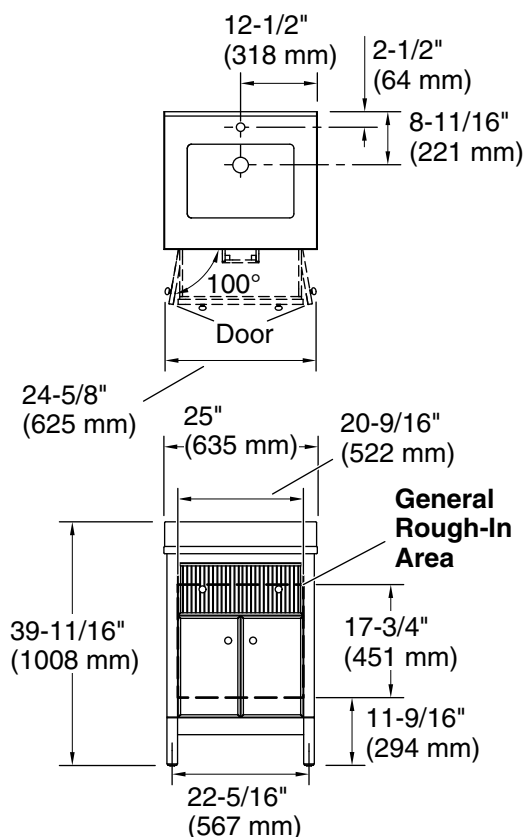
Technical Information
All product dimensions are nominal.

Notes
Install this product according to the installation instructions.

Select the type of fastener based upon the wall material. Two 250 lb (113.4 kg) minimum load bearing fasteners are recommended with a lag bolt of length to clear obstacles in the wall and 5/16" washers. Calculate the proper lag bolt length by adding the 1-1/2" (38 mm) backing material, plus the wallboard thickness, plus the back rail thickness.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
10-27-2023 22:16 - US/CA/MX

THE BOLD LOOK
OF KOHLER®