

**Features**

- 0.5 gpf (1.9 lpf).
- Activation distance is factory-set.
- Chloramine and chlorine resistance on all rubber components exposed to waterway.
- Engineered for optimal performance with KOHLER® commercial fixtures.
- 125-micron filter protects internal components.
- No external flush volume adjustment ensures water conservation.
- 24-hour automatic sentinel flush keeps trapway fresh.
- Mechanical override enables flushometer to be used manually even during a power outage.
- Powered by a 30 year/875,000 cycle hybrid energy cell.
- Less stop valve and tailpiece.

**Material**

- Brass construction with durable Polished Chrome finish.

**Technology**

- Flushometer activates when hand is waved over electronic infrared WAVE sensor.
- Patented piston technology for superior flush volume accuracy.

**Installation**

- Intended for urinal installations with  $\frac{3}{4}$ " (19 mm) top spud coupling connection.

**Recommended Products/Accessories**

K-23723 Faucet cleaner

**Optional Products/Accessories**

GP1118986 Flushometer Extension Kit  
K-10313 Flushometer 12" rough-in kit

**ADA   CSA B651   OBC****Codes/Standards**

ASME A112.18.1/CSA B125.1  
ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

**KOHLER® One-Year Limited Warranty**

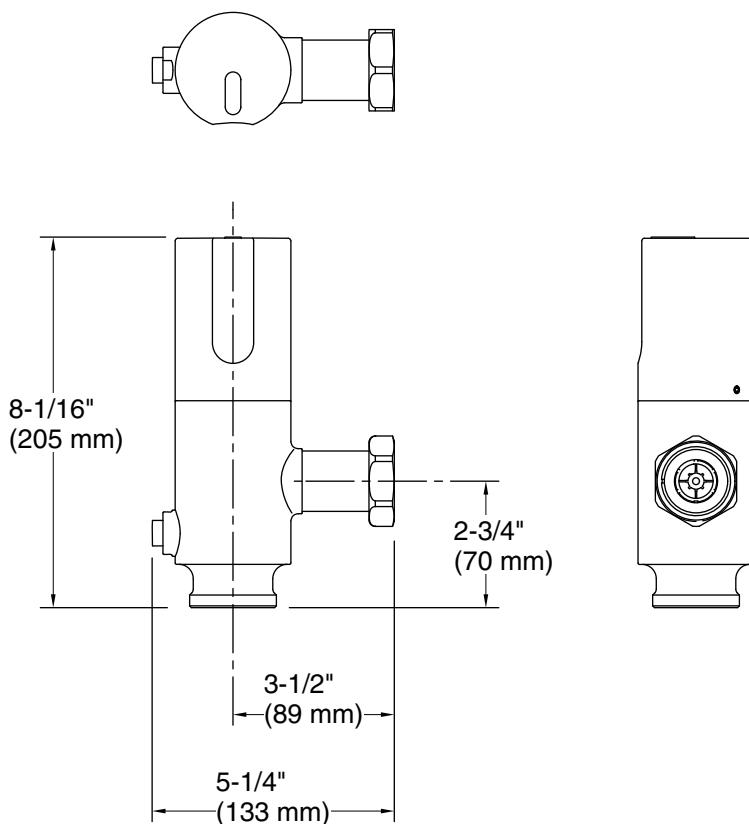
See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color   Code   Description**

 CP   Polished Chrome

**Technical Information**

All product dimensions are nominal.

**Pressure/fixture Supply Requirements**

Fixture pressure      80 psi (551.6 kPa)  
max (static):

Fixture pressure min    25 psi (172.4 kPa)  
(static):

Min flowing pressure:    25 psi (172.4 kPa)

Min flow rate:          25 gpm (94.6 lpm)

**Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.