




# Levity® Plus

Frameless sliding shower door  
**K-702422-L**

## Features

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Innovative roller design with stainless steel bearings simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Interior and exterior towel bars provide integrated storage on the doors.
- Cushioned center guide provides smooth, quiet sliding action.
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Smooth, easy-to-clean wall jambs.
- Tempered glass ensures enhanced safety and durability.

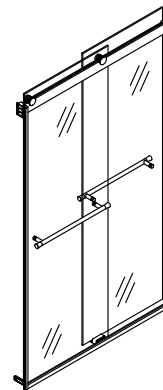

## Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

## Material

- Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.
- Anodized aluminum prevents rust and corrosion.

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Installation

- Fits opening widths 44-5/8" – 47-5/8" (1134 – 1210 mm).
- 77-9/16" (1970 mm) high, with 71-9/16" (1818 mm) minimum head clearance.
- 3" (76.2 mm) width adjustment.
- Out-of-plumb adjustability simplifies installation.
- For residential use only.
- Not for use in hospitality.

## Available Glass Options



| Code | Description   |
|------|---------------|
| L    | Crystal Clear |

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Included Components

Additional Components:  
Hardware kit

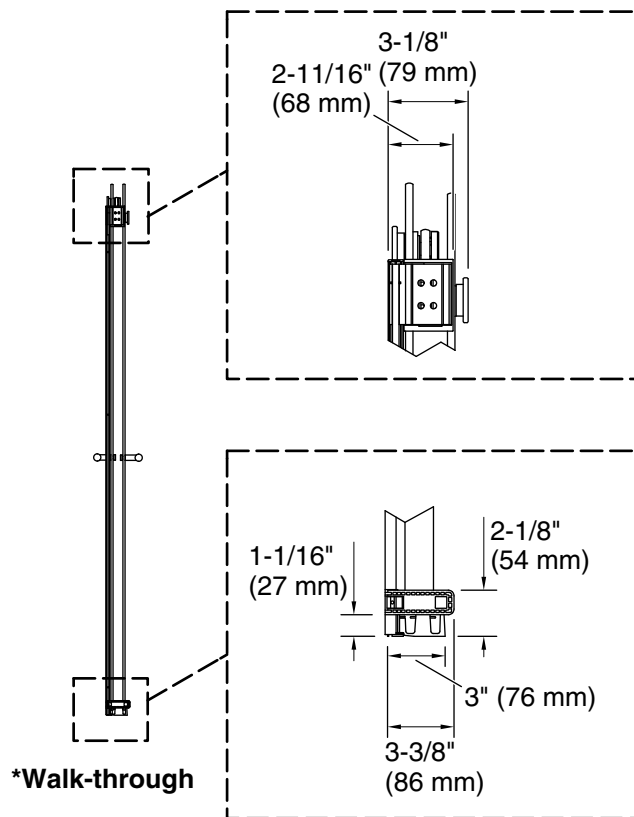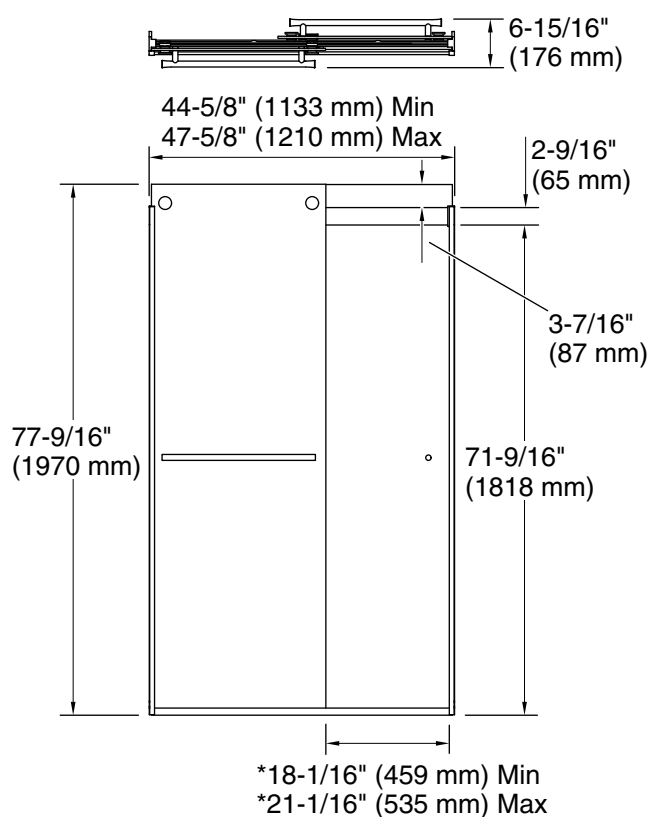

### Technical Information

All product dimensions are nominal.

|                            |                              |
|----------------------------|------------------------------|
| Installation type:         | For shower base installation |
| Opening Width - Min:       | 44-5/8" (1133 mm)            |
| Opening Width - Max:       | 47-5/8" (1210 mm)            |
| Walk-through - Min:        | 18-1/16" (459 mm)            |
| Walk-through - Max:        | 21-1/16" (535 mm)            |
| Base-To-Wall Radius - Max: | 1/2" (13 mm)                 |
| Glass thickness:           | 5/16" (8 mm)                 |
| Glass coating:             | CleanCoat+                   |

### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 80-1/2" (2045 mm) to allow for installation clearance.