

# Constellation™

90" wall-mount basin lavatory system K-81031-BSS

### **Features**

- Lavatory system offers contemporary styling for commercial
- Basin and trough slope design prevents water from splashing back on user
- Predrilled mounting holes for faucets and soap dispensers
- Drain strainers help prevent debris from entering drains
- Lavatory system available in your choice of Silestone® guartz or Corian® Solid Surface in a host of color options
- Silestone® quartz provides exceptional durability and stain resistance, making it easy to maintain
- Corian® Solid Surface has a nonporous surface to help prevent bacteria and mold growth
- Vandal-resistant locking doors on stainless steel shroud conceal pipes and swing open to provide easy below-deck access for maintenance
- Requires select Composed®, Kumin®, or Oblo® deck-mount faucet and soap dispenser bundles (sold separately)

### Installation

Wall-mount

### Recommended Products/Accessories

K-181031-BB1 Touchless lavatory faucets & soap dispensers with Kinesis® sensor technology, AC-powered, 0.5 gpm K-181031-BC1 Touchless lavatory faucets & soap dispensers with Kinesis® sensor technology, AC-powered,

K-181031-BK1 Touchless lavatory faucets & soap dispensers Color tiles intended for reference only. with Kinesis® sensor technology, AC-powered, 0.5 gpm



**CSA B651** ADA

### Codes/Standards

**IAPMO IGC 156** ADA ICC/ANSI A117.1 **CSA B651** 

## **KOHLER® One-Year Limited** Warranty

See website for detailed warranty information.

## Available Colors/Finishes


Color	Code	Description
	KCC	Canvas
	KCD	Designer White
	KCE	Ash Concrete
	KCG	Glacier White
	KCN	Neutral Concrete
	KCR	Arrow Root
	KCT	Concrete
-	KEB	Et Bianco Cal
	KED	Desert Silver
10	KEG	Et Cal Gold
	KEH	Miami White
	KEP	Pearl Jasmine
	KES	Et Statuario
	KEW	Iconic White







# **Constellation™**

90" wall-mount basin lavatory system **K-81031-BSS** 

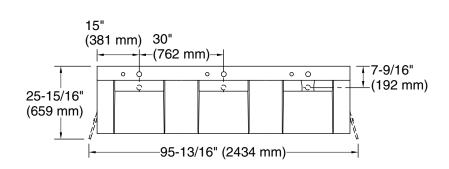



**Recommended ADA Installation** 

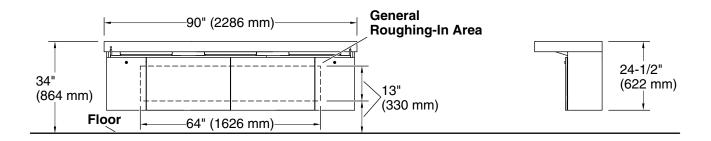

### **Technical Information**

All product dimensions are nominal.

Min. base cabinet 24" (610 mm)

width:

Drain hole: 1-3/4" (44 mm)

### **Notes**

Install this product according to the installation instructions.

Select the type of fastener based upon the wall material. 500 lb (227 kg) minimum load bearing fasteners are recommended.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

