

Remodel Rite-Temp[™] bath and shower trim kit, 2.5 gpm K-TS21948-4Y

Features

- 12" (305 mm) escutcheon plate covers two-handle valve assembly holes.
- Single lever handle allows for both on/off activation and temperature setting
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Simple thumb tab smoothly transitions between sprays
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup
- 2.5 gpm (9.5 lpm) maximum flow rate at 80 psi (5.5 bar)
- 5" (127 mm) spout with slip-fit connection and diverter knob
- Requires Rite-Temp[™] pressure-balancing valve (sold separately)

Material

- Premium material construction for lasting durability
- KOHLER finishes resist corrosion and tarnishing

Installation

- Wall-mount
- 1/2" 14 NPT connection

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies 1307346 Retro mixer cap for K-304 Rite-Temp valve 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description



- CP Polished Chrome
- BN Vibrant[™] Brushed Nickel
- BL Matte Black



KOHLER, Faucets

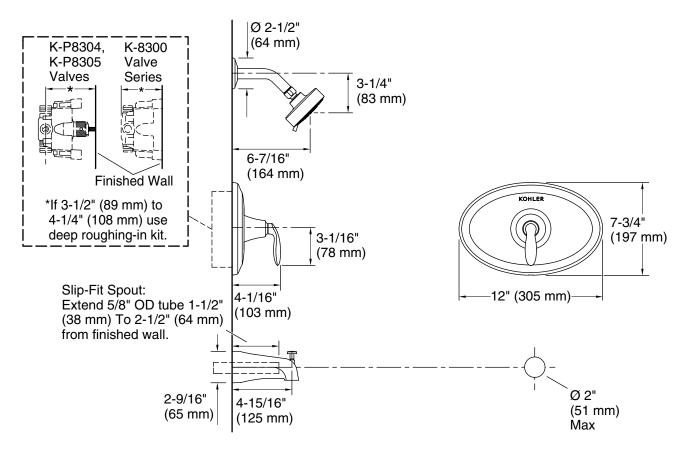

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum 2.5 gal/min (9.5 l/min) flow: Pressure: 45 psi (3.1 bar)

Notes

Install this product according to the installation instructions.

