

## Features

- Ceramic spout.
- Brushed nickel lever handle and valve.
- One-piece self-contained ceramic disc valve allows both volume and temperature control.
- Touch-activated drain with tailpiece.
- 4-1/2" (114 mm) spout reach.
- Single-hole mounting.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes


*Color tiles intended for reference only.*

### Color Code Description



0 White

96 Biscuit

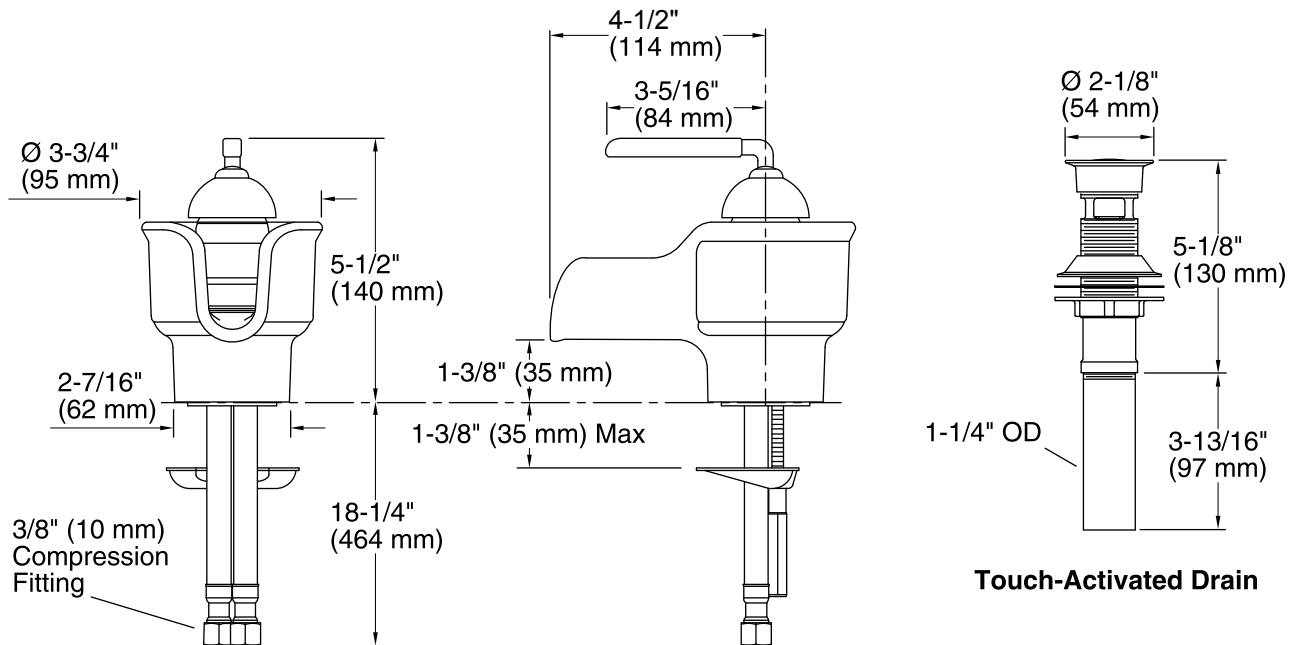

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate:	1.5 gal/min (5.7 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	Yes
Drain tailpiece included:	Yes

### Spout:

Spout reach:	4-1/2" (114 mm)
Handle clearance:	3-5/16" (84 mm)

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.