



# Underscore® Rectangle

72" x 42" Heated BubbleMassage™ air bath w/ whirlpool  
K-1174-XHGH

## Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Eight Flexjet® hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in heater.
- Automatic and manual purge cycles remove residual water from air channels after use.
- 60-minute automatic shutoff timer.
- Slotted overflow allows for deep soaking.
- Generous 72" length provides spacious bathing for up to two people.
- Integral lumbar support.
- Keypad control.
- Textured bottom surface.

## Material

- Acrylic.

## Technology

- Heated BubbleMassage™ technology warms and humidifies air before it enters the bath.

## Installation

- Drop-in or undermount.
- Center drain.

## Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain  
K-9698 Flexjet® Whirlpool Trim Kit

or

K-7272 PVC Slotted Overflow Bath Drain  
K-9698 Flexjet® Whirlpool Trim Kit

## Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-1703 Whirlpool Remote Control  
K-9497 2-1/2" Keypad Trim  
K-24916 Wireless Music Kit  
K-702200-G54 Frameless Sliding Bath Door  
K-702200-G73 Frameless Sliding Bath Door  
K-702200-L Frameless Sliding Bath Door  
K-702205-L Frameless Sliding Bath Door  
K-706000-D3 Frameless Sliding Bath Door  
K-706000-L Frameless Sliding Bath Door  
K-706003-L Frameless Sliding Bath Door  
K-706004-D3 Frameless Sliding Bath Door



## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2

**KOHLER® Hydrotherapy Components**  
**Five-Year Limited Warranty**  
**KOHLER® Plastic Baths and Receptors**  
**Lifetime Limited Warranty**

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description   |
|-------|------|---------------|
|       | 0    | White         |
|       | 96   | Biscuit       |
|       | NY   | Dune          |
|       | 95   | Ice™ Grey     |
|       | 58   | Thunder™ Grey |
|       | 7    | Black Black™  |

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

1-25-2020 05:41 - US/CA

THE BOLD LOOK  
OF **KOHLER**®




# Underscore® Rectangle

72" x 42" Heated BubbleMassage™ air bath w/ whirlpool



K-1174-XHGH

No change in measurements if connected with drain illustrated. (K-7272)




Drop-in Rim Detail

Blower Motor Access  
30" (762 mm) W x 15" (381 mm) H Min

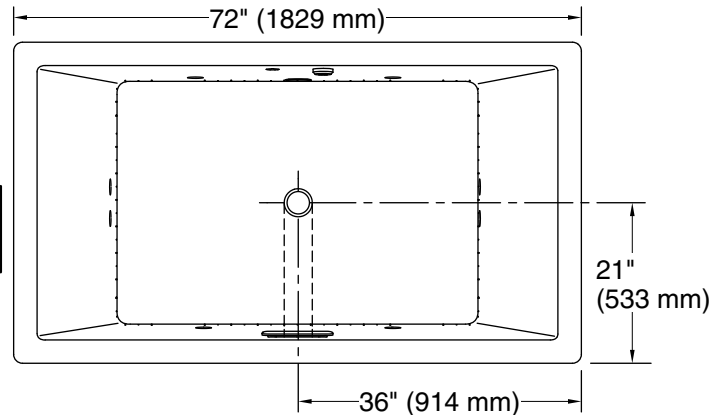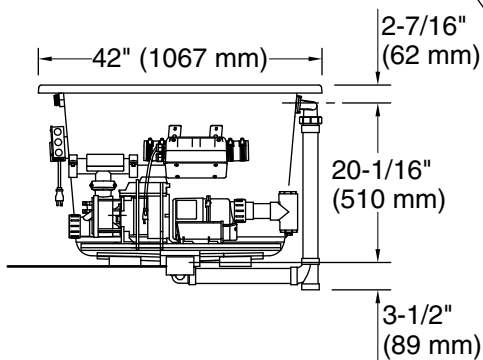

Lumbar Angle 33°

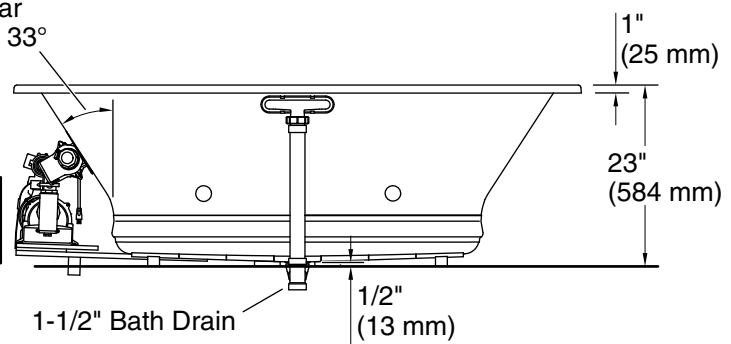

## Required Electrical Service

Three dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|                 |                    |
|-----------------|--------------------|
| Blower:         | 120 V, 15 A, 60 Hz |
| Air bath, Pump: | 120 V, 15 A, 60 Hz |
| Heater:         | 120 V, 15 A, 60 Hz |

## Technical Information

All product dimensions are nominal.

|                              |   |
|------------------------------|---|
| Installation:                | Drop-in, Undermount                                       |
| Drain location:              | Center  |
| Basin area, bottom:          | 45-3/4" x 32" (1162 mm x 813 mm)                          |
| Basin area, top:             | 66" x 36" (1676 mm x 914 mm)                              |
| Weight:                      | 203 lbs (92.1 kg)   |
| Minimum floor load:          | 64.1 lbs/ft² (313 kg/m²)                                  |
| Water depth:                 | 19" (483 mm)  |
| Water capacity:              | 139 gal (526.2 L)   |
| Cutout:                      | Drop-in, 71-1/2" x 41-1/2" (1816 mm x 1054 mm)            |
| Electrical component rating: | Blower: 120 V, 10 A, 60 Hz<br>Air bath: 120 V, 5 A, 60 Hz |

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.