

Features

- Single lever handle allows for both volume and temperature control.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Includes metal pop-up drain with 1-1/4" tailpiece.
- 4-3/8" (111 mm) spout reach.
- Coordinates with July faucets, accessories, and showering components to complete your bathroom.
- Premium Metal Construction
- For single-hole installation.
- Pre-attached flexible supply lines simplify installation
- Single lever handle allows for both on/off activation and temperature setting.
- Red/blue indexing on handle.
- 1.2 gpm (gallons per minute) flow rate.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Temperature memory allows the faucet to be turned on and off at the exact temperature position you set during use.
- Flexible supplies for simplified installation.
- Includes stationary spout and pop-up drain with 1-1/4-inch tailpiece.
- Coordinates with other products in the July collection.
- Brass construction.
- KOHLER finishes resist corrosion and tarnishing.
- Single-hole
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

Installation

- Bath- or deck-mount.



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	G	Brushed Chrome

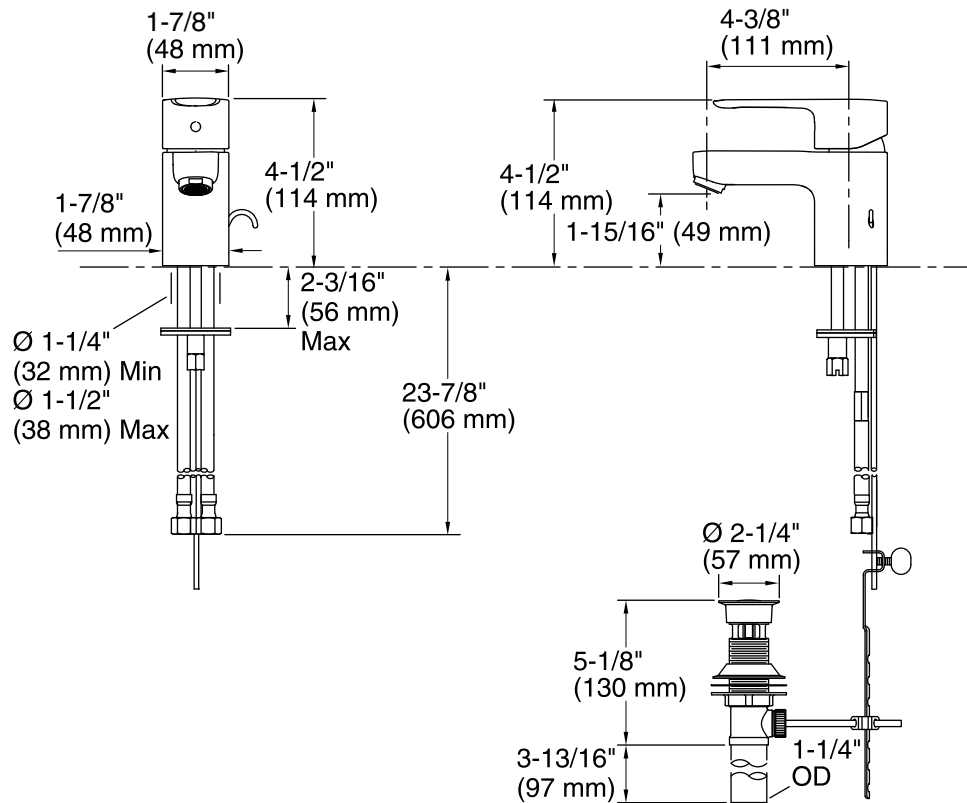

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain tailpiece included: Yes

Spout:

Spout reach: 4-3/8" (111 mm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.