



2.5 gpm multifunction handshower with Katalyst® **K-21335**

Features

- Advanced spray engine provides two spray experiences: full-coverage and targeted massage.
- Full-coverage spray produces an encompassing spray for everyday use and utilizes Katalyst® air induction to create large, full drops.
- Targeted massage spray is a focused stream for targeting sore muscles or use as a utility spray.
- Intuitive and easy push-button activation to switch between two sprays.
- Ergonomic design is comfortable and easy to grip.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- 2.5 gpm (gallons per minute) flow rate.
- Contains flow-regulating check valve for backflow prevention.

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

Optional Products/Accessories

K-9660 Vacuum Breaker





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


| Color | Code | Description |
|-------|------|--------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | BN | Vibrant® Brushed Nickel |
| | BV | Vibrant® Brushed Bronze |
| | RGD | Vibrant Rose Gold |
| | TT | Titanium |





Shift™+ Round

2.5 gpm multifunction handshower with Katalyst® **K-21335**

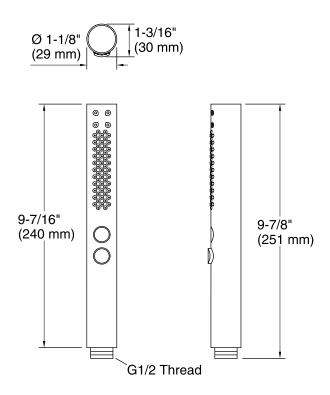

Technical Information

All product dimensions are nominal.

Drain included: No

Handshower:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Notes

For use with automatic compensating valves rated at 2.2 gal/min (8.3 l/min) or less.

Install this product according to the installation instructions.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.

