

### Material

- Two lever handles allow for both volume and temperature control.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Handles pre-assembled on KOHLER Ultraglide™ Ceramic Disc Valves to simplify installation.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1 bar)].
- Includes metal touch-activated drain with 1-1/4" tailpiece.
- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.
- For 8" (203 mm) to 16" (406 mm) centers.
- Coordinates with Tempered™ faucets and showering components to complete your bathroom.
- Two-handle widespread faucet for 8" - 16" centers.
- Two lever handles offer separate control of hot and cold water.
- KOHLER® ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Includes metal pop-up drain with 1-1/4" tailpiece.
- 1.2 gpm (gallons per minute) flow rate.
- Coordinates with other products in the Tempered collection.
- Premium material construction.
- KOHLER finishes resist corrosion and tarnishing.
- Widespread
- Handles pre-assembled on valves and quick-connect fittings simplify installation.



**ADA** **CSA B651** **OBC**

### Codes/Standards

ASME A112.18.1/CSA B125.1  
 NSF/ANSI 61  
 NSF/ANSI 372  
 All applicable US Federal and State material regulations  
 DOE - Energy Policy Act 1992  
 EPA WaterSense®  
 California Energy Commission (CEC)  
 ADA  
 ICC/ANSI A117.1  
 CSA B651  
 OBC


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black

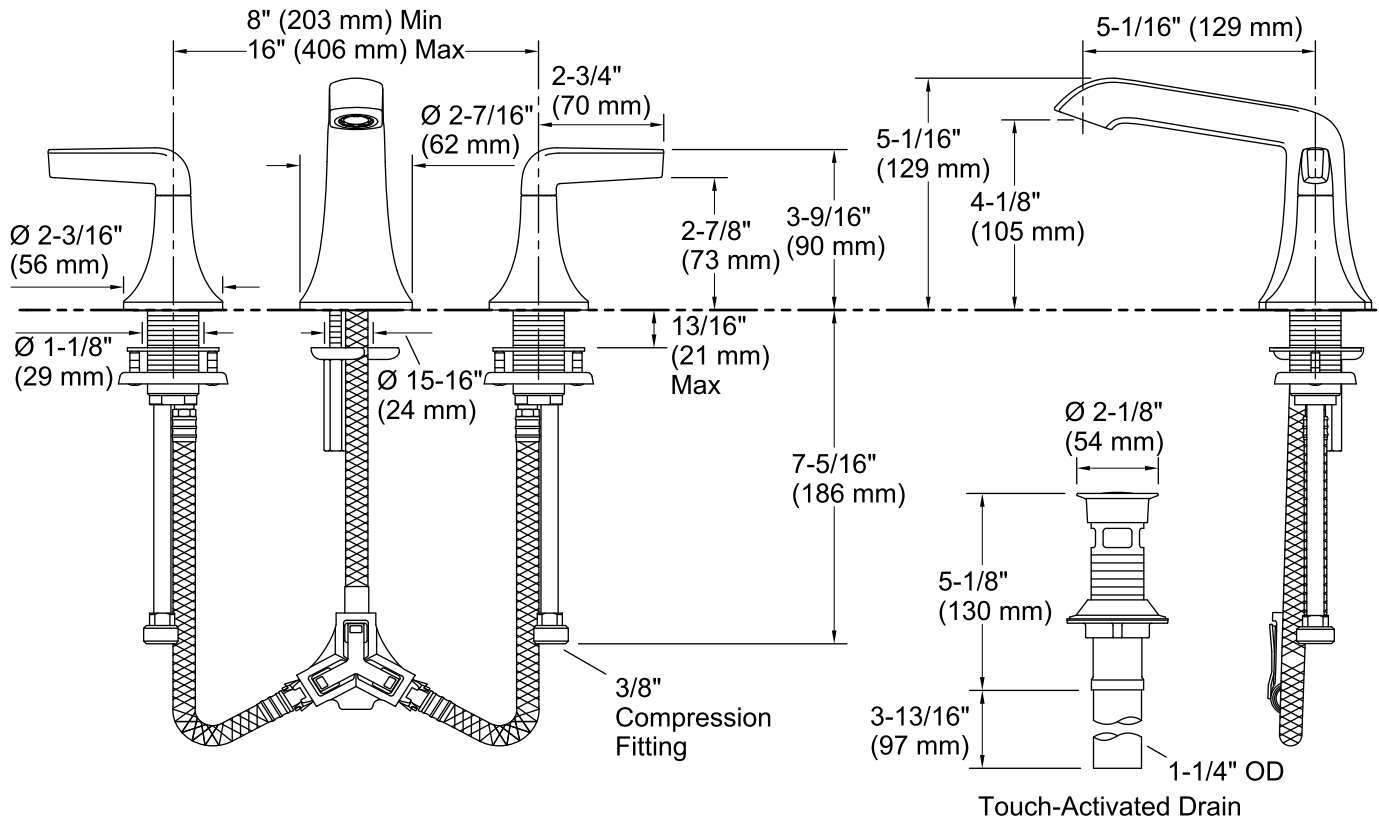

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	Yes
Drain with overflow:	Yes
Drain tailpiece included:	Yes

#### Spout:

Spout reach:	5-1/16" (129 mm)
Handle clearance:	2-3/4" (70 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.