

### Features

- Semi-professional kitchen faucet with finish-matched easy-clean hose cover.
- Switch-Grip™ sprayhead rotates in 90 degree increments. Face buttons in the direction you prefer.
- Three-function pull-down sprayhead with touch-control allows you to switch between stream, Sweep® spray and BerrySoft® spray.
- Sweep® spray is a wide, powerful blade of water that sweeps your dishes and sink clean.
- BerrySoft® is a light spray ideal for washing hands, rinsing delicate dishware and prepping fruits and vegetables.
- DockNetik® magnetic docking system securely locks the sprayhead into place when not in use.
- 21" high-arch 360° rotating swing spout offers vertical clearance for tall cookware and pitchers.
- 10" (254 mm) swing spout reach.
- 1.5 gpm (5.7 l/m) maximum flow rate at 60 psi (4.1 bar).
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- MasterClean™ sprayface withstands mineral buildup to wipe clean easily without cleaning products.
- KOHLER® ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.

### Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Deck-mount.
- For single-hole installation. (3-hole escutcheon available; K-22071, sold separately).
- Flexible supply lines simplify installation.

### Adapters, Rough-in and Extension Kits

1327990 Range: 2-1/2" (64 mm) - 4-5/8" (117 mm)

### Optional Products/Accessories

K-22071 Three-hole kitchen faucet escutcheon



ADA CSA B651

### Codes/Standards




ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
	BL	Matte Black

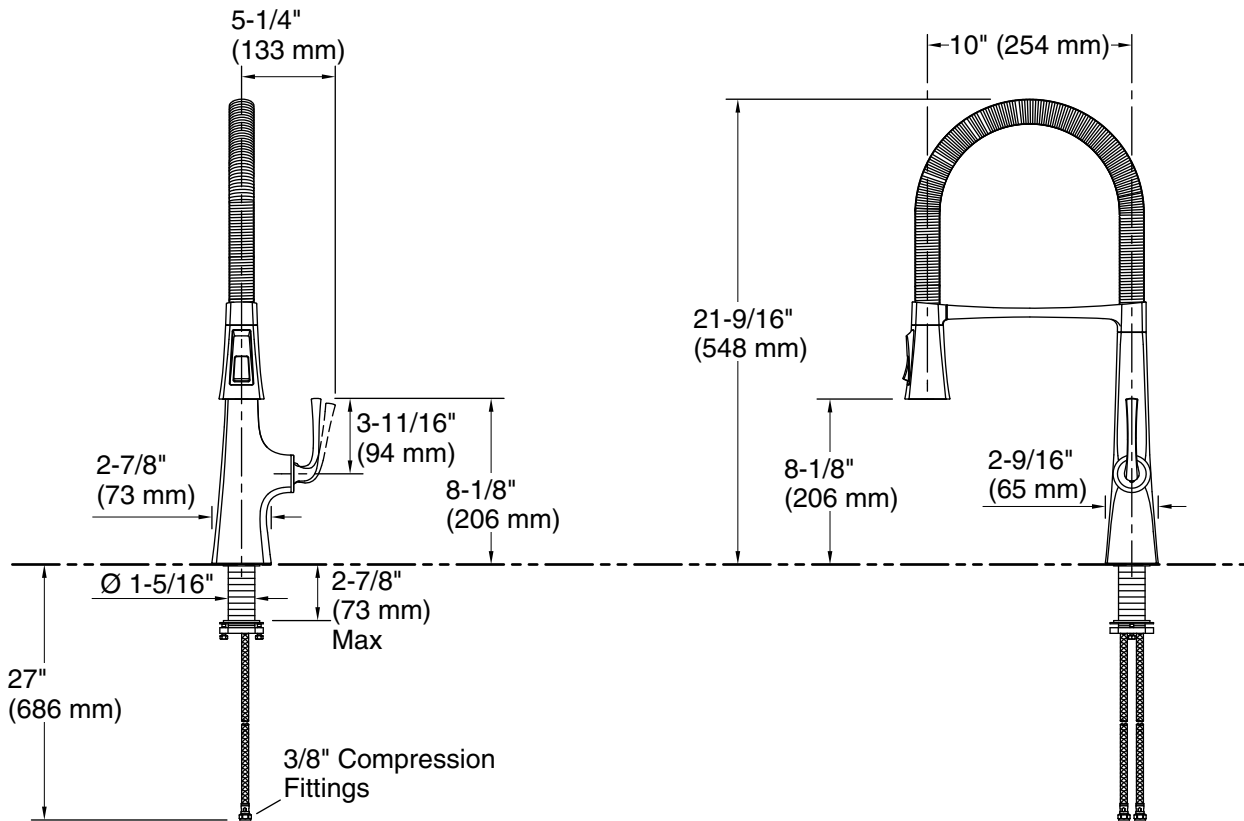

#### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

#### Spout:

Spout reach: 10" (254 mm)

Handle clearance: 5-1/4" (133 mm)

#### Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.