

Tailor™ farmhouse kitchen sink K-22569

Features

- Customizable farmhouse apron lets you choose a design to complement kitchen decor.
- Match the farmhouse apron with your countertop/backsplash material or select a KOHLER insert.
- Inserts are changeable.
- Patented Tailor™ carrier bracket system makes for simple and secure insert installation.
- Fits minimum 36" apron sink base cabinet.
- Single large bowl.
- 9" depth.
- No faucet holes.
- Self-Trimming® apron overlaps the cabinet face for easy installation.
- Rear drain increases workspace in the sink and storage space underneath.
- SilentShield® sound-absorption technology offers quieter performance.
- Rounded 0.39" (10mm) corners are easy to clean.

Material

- Handcrafted from stainless steel.
- 16-gauge basin and 4-gauge apron.

Installation

- Under-mount farmhouse.
- Includes insert carrier and hardware to attach customer's own insert material or a KOHLER insert.
- Carrier has adjustability to ensure insert is centered.
- Apron is designed to accommodate traditional countertop material thicknesses of 1.18" (3cm) or less.

Recommended Products/Accessories

K-8801 Sink Strainer K-8799 Sink Strainer

Optional Products/Accessories

K-22572 Flora insert

K-22573 Etched Stone insert

K-22574 Carved Stone insert

K-22578 tile frame

Included Components

Additional Components:

K-6474 Sink Rack

Cutout templates

Installation hardware



Codes/Standards

ASME A112.19.3/CSA B45.4


Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks

See website for detailed warranty information.





Tailor™ farmhouse kitchen sink K-22569

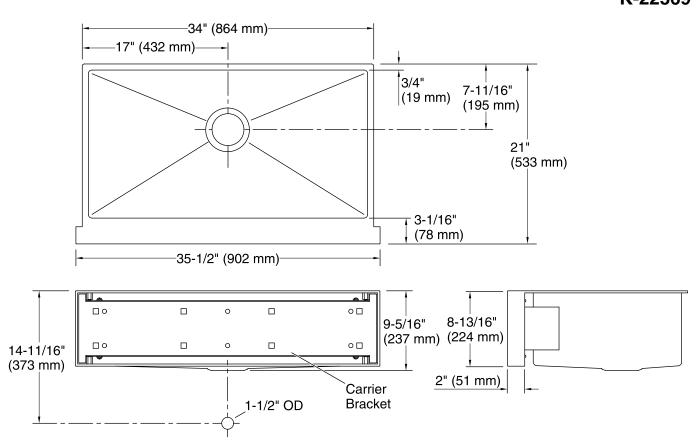

Technical Information

All product dimensions are nominal. Installation: Under-mount

Bowl area (Only): Length: 32-1/2" (826 mm)

Width: 17-3/16" (437 mm) Bowl depth: 9" (229 mm) Water depth: 9" (229 mm)

Drain hole: 3-3/4" (94 mm)

Template: Apron-front, 1224194-7, required, included

1358496-7, not required, included

Notes

Install this product according to the installation instructions.

Allow a minimum of 3" (76 mm) clearance for the back 3/4" (19 mm) sink rim flange for clip attachment.

The 3/4" (19 mm) side rim flanges are supported without using the clip attachment. See the installation guide for further instructions.

