

Rêve® Comfort Height®

One-piece elongated chair height toilet **K-3797**

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Two-button flush offers a choice of .8 or 1.6 gallons per flush (apf).
- Skirted trapway facilitates easy cleaning and enhances design.
- Includes Rêve seat with Quiet-Close[™] functionality.
- Coordinates with other products in the Rêve collection.

Technology

 Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- 12-inch rough-in.
- Supply line not included.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-9384 Dual-flush Actuator 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Included Components

Additional Components:
Dual flush push buttons
Installation kit
Installation template
Tank accessory pack
Tank cover

Toilet seat





Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


olor	Code	Description
	0	White
	HW1	Honed White
	96	Biscuit
	47	Almond



KOHLER®

Rêve® Comfort Height®

One-piece elongated chair height toilet K-3797

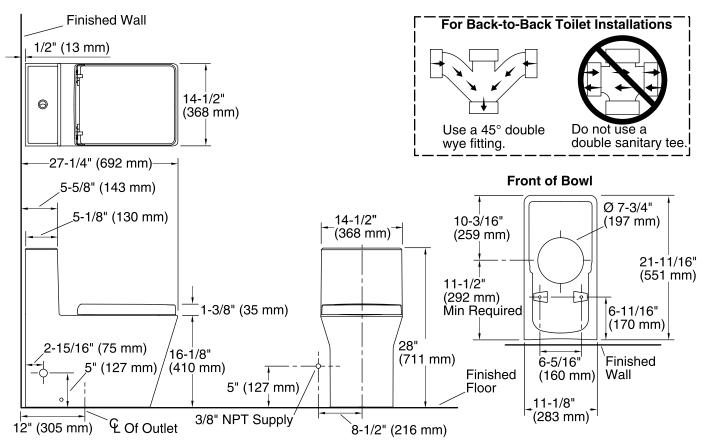

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)
Reduced: 0.8 gpf (3 lpf)

Water surface size: 4-1/8" x 5-1/2" (105 mm x 140 mm)

Rough-in: 12" (305 mm) Seat-mounting holes: 7-7/8" (200 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

