

Corbelle™ Skirted Trapway Two-Piece Toilet K-3814-RA

Features

- Vitreous China.
- Comfort Height® Elongated Bowl.
- Revolution 360[™] swirl flushing system powered by AquaPiston[®].
- Includes right-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed skirted trapway.
- Patented ReadyLock[™] installation system.
- 12" (305 mm) rough-in.
- CleanCoat® surface coating.
- Less seat and supply.
- 9-3/4" (248 mm) x 7-1/4" (184 mm) water area.
- 29 1/2" (749 mm) x 16-1/2" (419 mm) x 31-3/8" (797 mm).
- Floor mount / Floor outlet.

Components

Product includes:

K-4144 Elongated Toilet Bowl

K-4143-RA Toilet Tank

Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.





ADA CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


) White



KOHLER®

Corbelle[™]

Skirted Trapway Two-Piece Toilet K-3814-RA

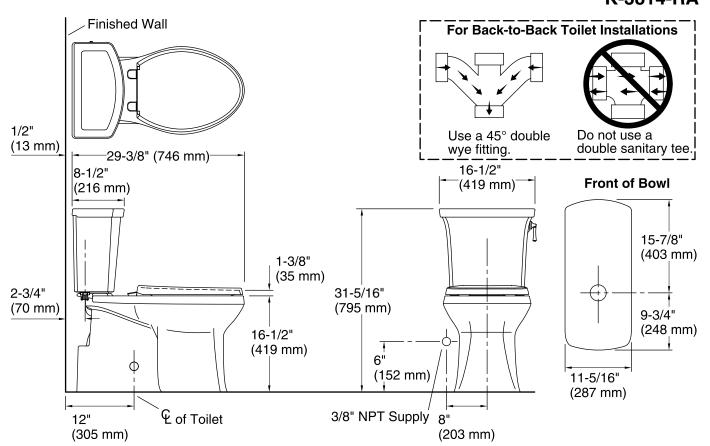

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: Gravity siphon jet Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 9-3/4" x 7-1/4" (248 mm x 184 mm)

Rim to water surface: 6-1/4" (159 mm) **Fixture Supply Requirements**

Min static pressure: 15 psi (103.4 kPa) Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing Codes require elongated toilets and elongated, open-front toilet seats in public bathrooms.

Accessibility standards require controls to be located on the open side of the toilet.

