Highline[®] Comfort Height[®]



Class Five® Toilet K-3999-RA

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height[®] feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Right-hand Polished Chrome trip lever included.
- Combination consists of the K-4467-RA tank and the K-4199 bowl.

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five[®] flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Standard 12-inch rough-in.
- Three-bolt installation.
- Seat and supply line not included.

Water Conservation & Rebates

- WaterSense[®] toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product meets water savings requirements for CALGreen and Colorado SB 14-103.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

Components

Product includes: K-4199 Comfort Height® Elongated Bowl K-4467-RA Toilet Tank Additional included component/s: Tank cover, Trip lever, and Bolt cap accessory pack.





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

- 0 White 96 Biscuit
 - 47 Almond






Highline[®] Comfort Height[®]

Class Five® Toilet

K-3999-RA

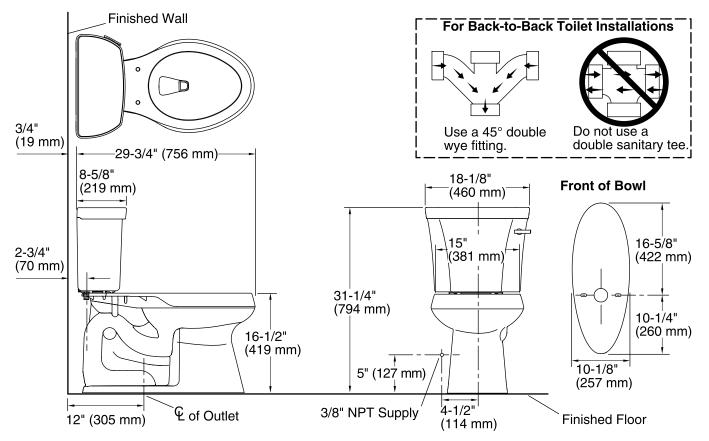

. .

| Technical Information All product dimensions are nominal. | |
|---------------------------------------------------------------------|--|
| Two-piece, Floor-mount | |
| Floor | |
| Elongated | |
| Class Five® | |
| 2-1/8" (54 mm) | |
| | |
| 1.28 gpf (4.8 lpf) | |
| 11-3/8" x 8" (289 mm x 203 mm) | |
| 5-3/8" (137 mm) | |
| 12 | |
| 5-1/2" (140 mm) | |
| | |

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

