

# Features

- Katalyst<sup>®</sup> Spray Technology with air induction ball joint (patent pending).
- Optimized sprayface for maximum performance.
- MasterClean<sup>™</sup> spray nozzles prohibit mineral build-up for easy cleaning.
- 1/2" -14 NPT connection.
- Single-function showerhead with Katalyst<sup>®</sup> Spray Technology.
- Showerarm and flange not included.
- 5-15/16" (151 mm) diameter sprayface.
- 1.75 gal/min (6.6 l/min) maximum flow rate.

# **Recommended Accessories**

K-7397 Shower Arm and Flange





# **Codes/Standards**

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense<sup>®</sup> California Energy Commission (CEC)

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

- CP Polished Chrome
- SN Vibrant® Polished Nickel
- PB Vibrant® Polished Brass
- BN Vibrant® Brushed Nickel
- BV Vibrant® Brushed Bronze
- 2BZ Oil-Rubbed Bronze




**Devonshire**<sup>®</sup>

Single-function Showerhead K-45413-G

# KOHLER. Faucets

# Devonshire® Single-function Showerhead K-45413-G

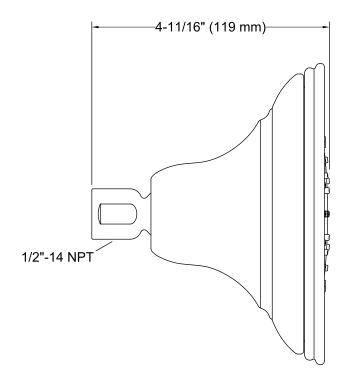

# **Technical Information**

All product dimensions are nominal.

## Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min) Pressure: 80 psi (5.5 bar)

# Ø 5-15/16" (151 mm)

# Notes

For use with automatic compensating valves rated at 1.4 gal/min (5.3 l/min) or less.

Install this product according to the installation instructions.

