



**Strive®**  
Under-Mount Kitchen Sink  
**K-5282**

### Features

- 36-inch minimum base cabinet width.
- Extra-large/medium bowls.
- Left bowl is sized to fit a half cookie sheet flat in the bottom of the basin.
- 9-inch depth.
- No faucet holes.
- Rear drain increases workspace in the sink and allows for more storage space underneath the sink.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes divider dishcloth bar, divider utility shelf, and bottom sink rack.
- Includes installation hardware.
- Rounded 10mm corners are easy to clean.



### Material

- Handcrafted from 16-gauge stainless steel.

### Installation

- Under-mount

### Recommended Accessories

- K-6445 Sink Rack
- K-6647 Right-Bowl Sink Rack
- K-6377 Sponge Caddy
- K-6378 Kitchen Brush Caddy
- K-6379 Kitchen Squeegee
- K-6382 Disinfecting Wipes Dispenser
- K-6383 Soap Dispenser
- K-8618 Paper Towel Holder
- K-8619 Flexible Kitchen Mat
- K-8801 Sink Strainer
- K-8799 Sink Strainer
- K-8624 Dish Scraper

### Optional Accessories

- K-6667 Wood Cutting Board

### Components

Additional included component/s: Hardware kit (3 required), Cut-out template, Divider dish cloth bar, Divider utility shelf, and Bottom bowl rack-left.

### Codes/Standards


ASME A112.19.3/CSA B45.4

### Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks

See website for detailed warranty information.



**Strive®**  
Under-Mount Kitchen Sink  
**K-5282**

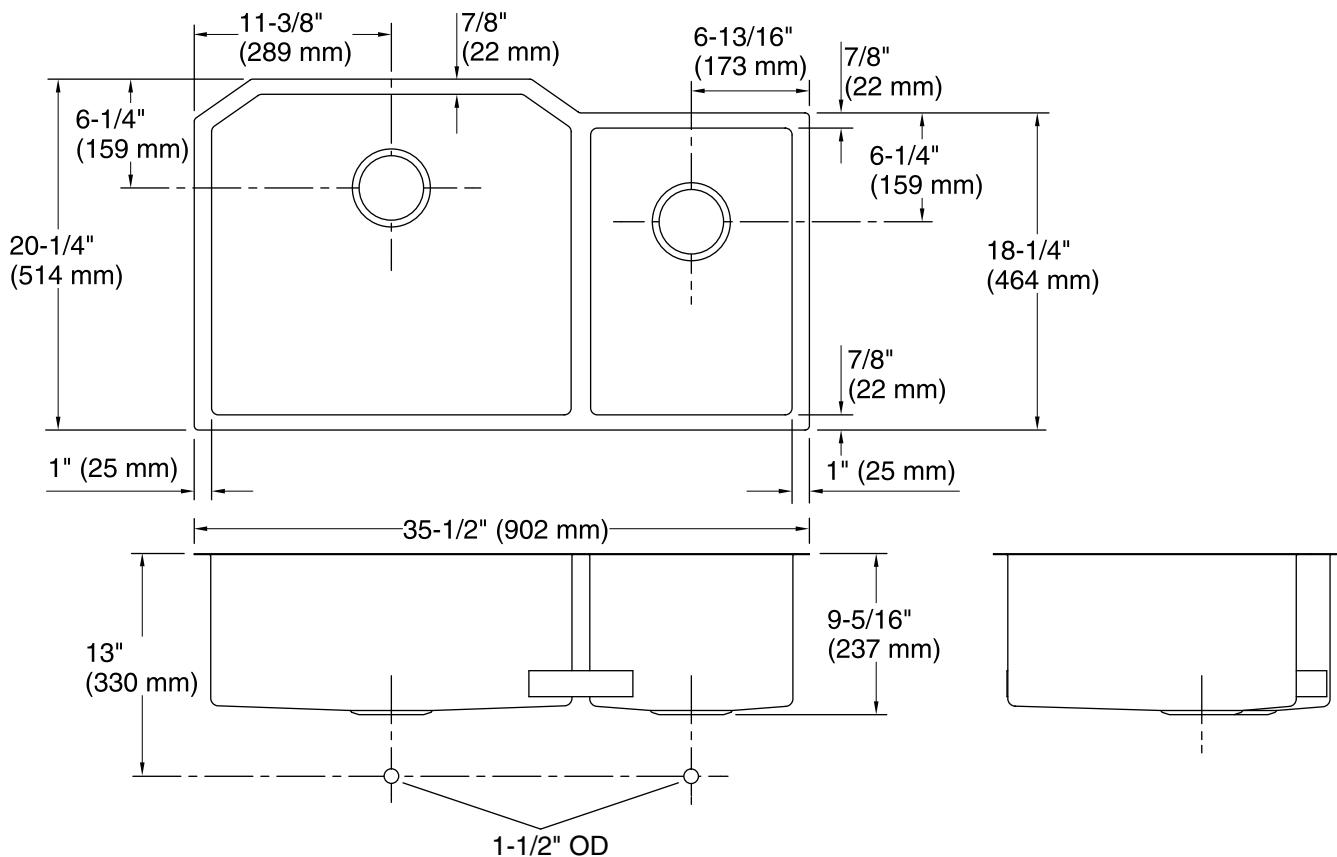

### Technical Information

All product dimensions are nominal.

Bowl configuration: Off-set Large/small

Installation: Under-mount

Min. base cabinet width: 39" (991 mm)

Bowl area (Left): Length: 20-3/4" (527 mm)  
Width: 18-1/2" (470 mm)  
Bowl depth: 9-5/16" (237 mm)  
Water depth: 9" (229 mm)

Bowl area (Right): Length: 11-5/8" (295 mm)  
Width: 16-1/2" (419 mm)  
Bowl depth: 9-5/16" (237 mm)  
Water depth: 9" (229 mm)

Drain hole: 3-11/16" (94 mm)  
Template: 1281147-7, required, included

### Notes

Install this product according to the installation instructions.

Allow a minimum of 3" (76 mm) clearance around the sink rim for clip attachment.

Minimum base cabinet width 36" - 39" (36" may require cabinet modifications). Consult an installer for confirmation.