

Highline®

Class Five® Dual Flush Toilet K-6393

Features

- Vitreous china.
- Elongated bowl.
- Class Five® dual flushing system.
- Polished chrome left-hand trip lever.
- Less seat and supply.
- 10" (254 mm) rough-in.
- High efficiency 1.6 gpf (6.1 lpf) or 1.1 gpf (4.2 lpf).
- 2-1/8" (54 mm) glazed trapway.
- 11-3/8" (289 mm) x 8" (203 mm) water area.

Recommended Accessories

K-4636 Toilet Seat

K-4688 Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4731-C Commercial Heavy-duty Toilet Seat

K-4731-CA Commercial Heavy-duty Toilet Seat

K-4731-GC Commercial Heavy-duty Toilet Seat

K-4731-SA Commercial Heavy-duty Toilet Seat

K-4731-SC Commercial Heavy-duty Toilet Seat

Components

Product includes:

K-4458 Dual-Flush Tank

K-4373 Toilet Bowl

Additional included component/s: Bowl, Tank, Tank cover, Trip lever, and Bolt cap accessory pack.





ADA CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense® ADA ICC/ANSI A117.1

CSA B651

OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™






KOHLER

Highline®

Class Five® Dual Flush Toilet K-6393

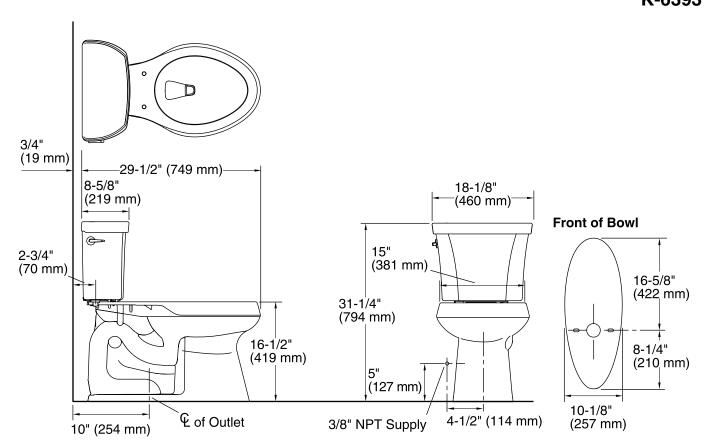

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: Class Five Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water surface: 5-3/8" (137 mm)
Rough-in: 10" (254 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing Codes require elongated toilets and elongated, open-front toilet seats in public bathrooms.

Accessibility standards require controls to be located on the open side of the toilet.

