

## Features

- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.
- Transparent wall jams offer unobstructed views of the bathing and showering space.
- Minimal top/bottom track and frameless glass panels create a more open feel, while also offering greater ease of cleaning.
- CleanCoat® glass treatment repels water and helps to maintain glass appearance over time.
- New bypass system offers an extremely smooth, quiet glide.
- Hardware includes a contemporary towel bar outside the shower and knob inside.

## Material

- Anodized aluminum hardware prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability

## Installation

- Out-of-plumb adjustability simplifies installation.

## Components

Additional included component/s: Hardware Kit.



## Codes/Standards




ASTM C1036  
ASTM C1048  
ANSI Z97.1 (Tempered Glass)  
CPSC 16CFR 1201


## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description             |
|--|------|-------------------------|
|  | SHP  | Bright Polished Silver  |
|  | ABZ  | Anodized Dark Bronze    |
|  | BNK  | Anodized Brushed Nickel |

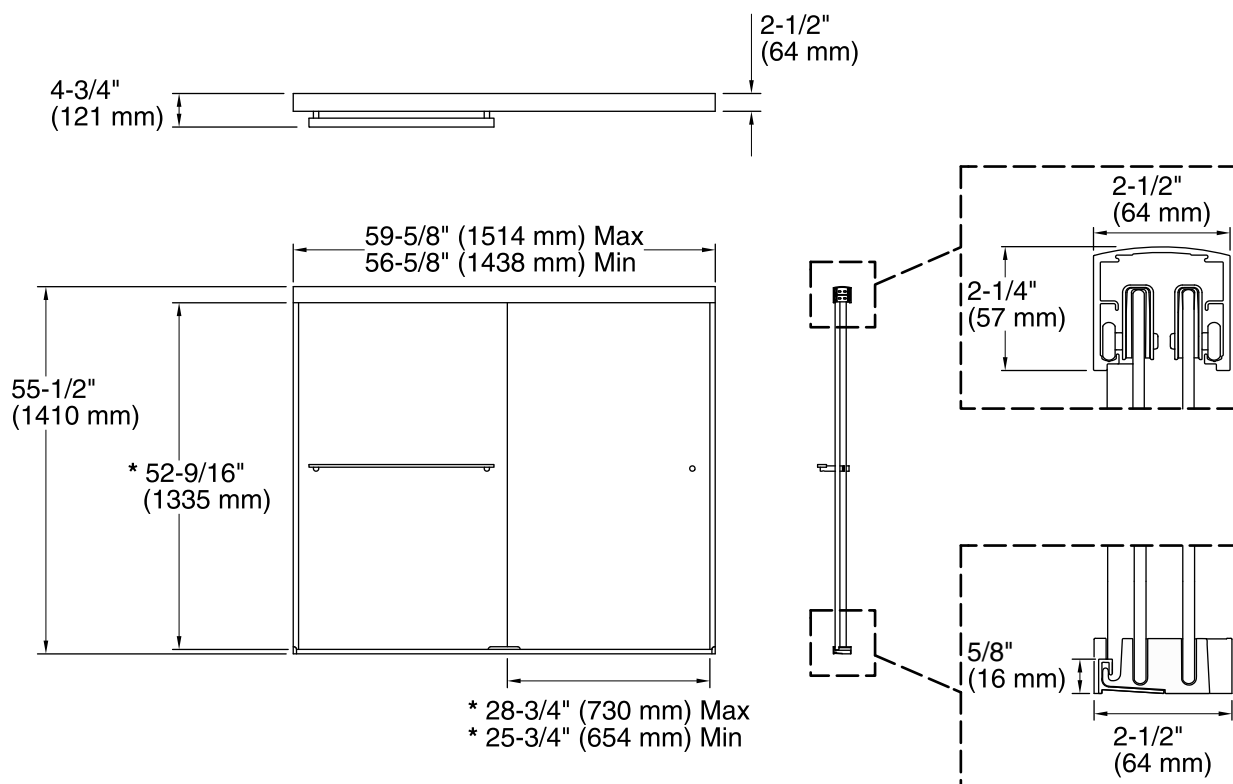

\* Walk-Through

## Technical Information

All product dimensions are nominal.

|                      |                       |
|----------------------|-----------------------|
| Frame material:      | Aluminum              |
| Installation type:   | For bath installation |
| Opening style:       | Sliding/Bypass        |
| Opening Width - Min: | 56-5/8" (1438 mm)     |
| Opening Width - Max: | 59-5/8" (1514 mm)     |
| Walk-through - Min:  | 25-3/4" (654 mm)      |
| Walk-through - Max:  | 28-3/4" (730 mm)      |
| Glass thickness:     | NaN-1/4" (6 mm)       |

## Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

**NOTICE:** The vertical opening should be a minimum of 58" (1473 mm) to allow clearance for installing the top track over the wall jambs.