



Frameless Swinging Shower Door K-707541-L

Features

- 5/16" (8 mm) thick tempered glass.
- Frameless design enphasizes glass and creates a sleek, minimalist look.
- Self-closing mechanism offers superior performance and security against water leakage.
- CleanCoat® glass treatment helps maintain glass appearance over time.

Material

- Anodized aluminum hardware prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Installs left or right-handed.
- Out-of-plumb adjustability simplifies installation.

Components

Additional included component/s: Hardware Kit.



Codes/Standards

ASTM C1036 ASTM C1048 ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
	BNK	Anodized Brushed Nickel







Frameless Swinging Shower Door K-707541-L

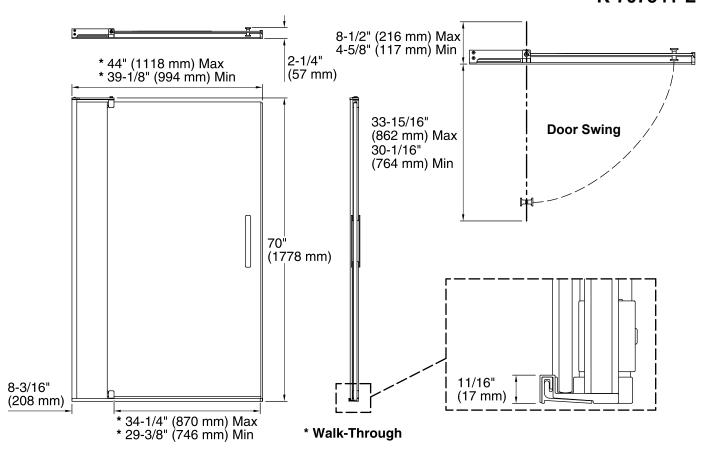

Technical Information

All product dimensions are nominal.

Frame material: Aluminum

Installation type: For receptor installation

Opening style: Pivot

Opening Width - Min: 39-1/8" (994 mm)
Opening Width - Max: 44" (1118 mm)
Walk-through - Min: 29-3/8" (745 mm)
Walk-through - Max: 34-1/4" (869 mm)
Glass thickness: NaN-5/16" (8 mm)

Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.

