

### Features

- 5/16" (8 mm) thick tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Self-closing mechanism offers superior performance and security against water leakage.
- CleanCoat® glass treatment helps maintain glass appearance over time.

### Material

- Anodized aluminum hardware prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

### Installation

- Installs left or right-handed.
- Out-of-plumb adjustability simplifies installation.

### Components

Additional included component/s: Hardware Kit.



### Codes/Standards

ASTM C1036  
ASTM C1048  
ANSI Z97.1 (Tempered Glass)  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

- |  |     |                         |
|--|-----|-------------------------|
|  | SHP | Bright Polished Silver  |
|  | ABZ | Anodized Dark Bronze    |
|  | BNK | Anodized Brushed Nickel |

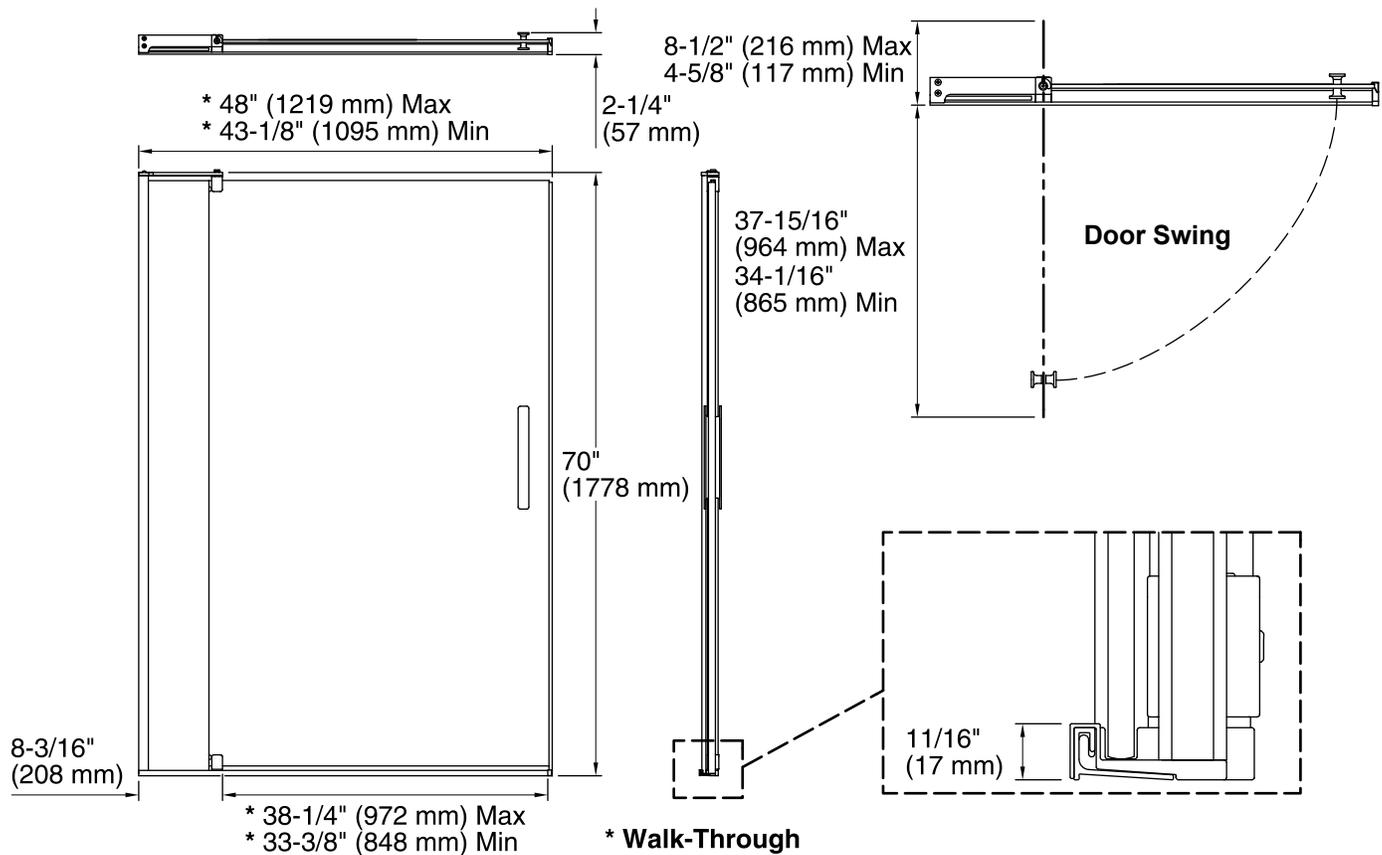

### Technical Information

All product dimensions are nominal.

Frame material:	Aluminum
Installation type:	For receptor installation
Opening style:	Pivot
Opening Width - Min:	43-1/8" (1096 mm)
Opening Width - Max:	48" (1219 mm)
Walk-through - Min:	33-3/8" (847 mm)
Walk-through - Max:	38-1/4" (971 mm)
Glass thickness:	NaN-5/16" (8 mm)

### Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

**NOTICE:** The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.