

Material

- 6 5/16" spout reach.
- Tube Spout.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Coordinate with your choice of Components widespread lavatory handles for a personalized design.
- Includes metal touch-activated drain with 1-1/4" tailpiece.
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom.
- Premium Metal Construction.
- KOHLER finishes resist corrosion and tarnishing.
- For 8" (203 mm) or 16" (406 mm) centers.
- Widespread.
- For use with Components K-77974-4, K-77974-8, K-77974-9, or K-77963-8A faucet handles (sold separately).
- 6-5/16-inch spout reach.
- Laminar flow aerator delivers a graceful stream while conserving water.
- 1.2 gpm (gallons per minute) maximum flow rate at 60 psi.
- Includes metal touch-activated drain with 1-1/4-inch tailpiece.
- Coordinates with Components faucets, shower trim, and accessories to complete your bathroom.
- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.
- Widespread or remote valve.
- For 8-inch or 16-inch centers.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

Recommended Products/Accessories

- K-77974-4 Widespread Bathroom Sink Faucet Handles
- K-77974-8 Widespread Bathroom Sink Faucet Handles
- K-77974-9 Widespread Bathroom Sink Faucet Handles
- K-77963-8A Remote Valve Bathroom Sink Faucet Handle



Codes/Standards

ASME A112.18.1/CSA B125.1
 NSF/ANSI 61
 NSF/ANSI 372
 All applicable US Federal and State material regulations
 DOE - Energy Policy Act 1992
 EPA WaterSense®
 California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BL	Matte Black
	3TR	Vibrant® Ombré Titanium/Rose Gold
	3RS	Vibrant® Ombré Rose Gold/Polished Nickel

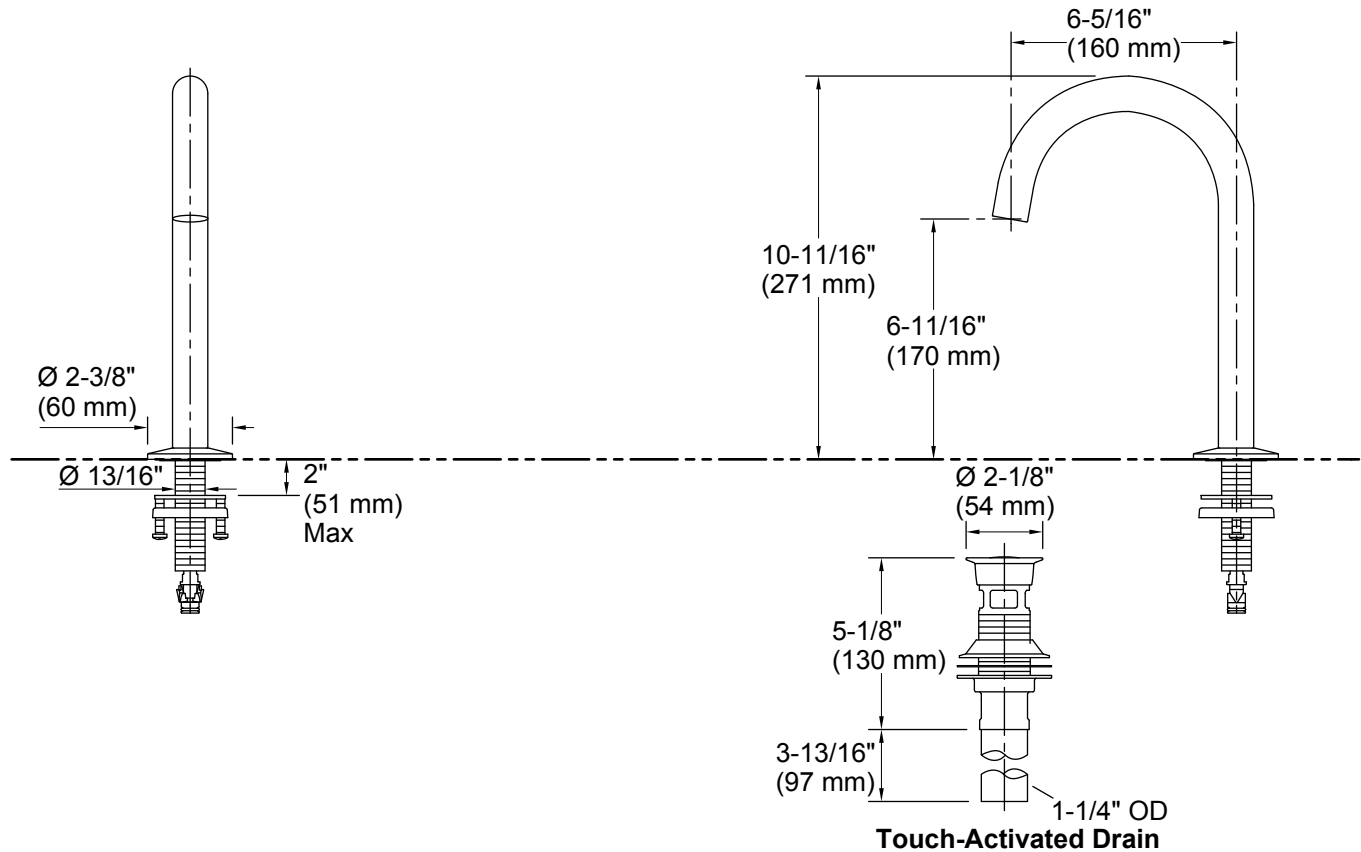

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 6-5/16" (160 mm)

Notes

Install this product according to the installation instructions.