

## Features

- Freestanding design creates a striking focal point in your bathing area.
- Sloped lumbar support on both ends.
- Safeguard® slip-resistant surface on bath floor.
- Slotted overflow allows for deep soaking.
- Center toe-tap drain.
- Includes one wooden pedestal base, four cast iron adjustable feet, and one wooden overflow/drain shroud.
- Coordinates with other products in the Rêve collection.

## Material

- KOHLER® enameled cast iron.
- Painted exterior.
- Wood composite pedestal base with Brilliant Blanc painted finish.

## Installation

- Freestanding

## Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/Whirlpool Footstop

## Included Components

Additional Components:

Cast iron adjustable feet (set of 4)

Wooden Float

wooden overflow/drain shroud



## Codes/Standards

ASME A112.19.1/CSA B45.2

ASTM F462

## KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty


See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description

|  |   |       |
|--|---|-------|
|  | 0 | White |
|--|---|-------|

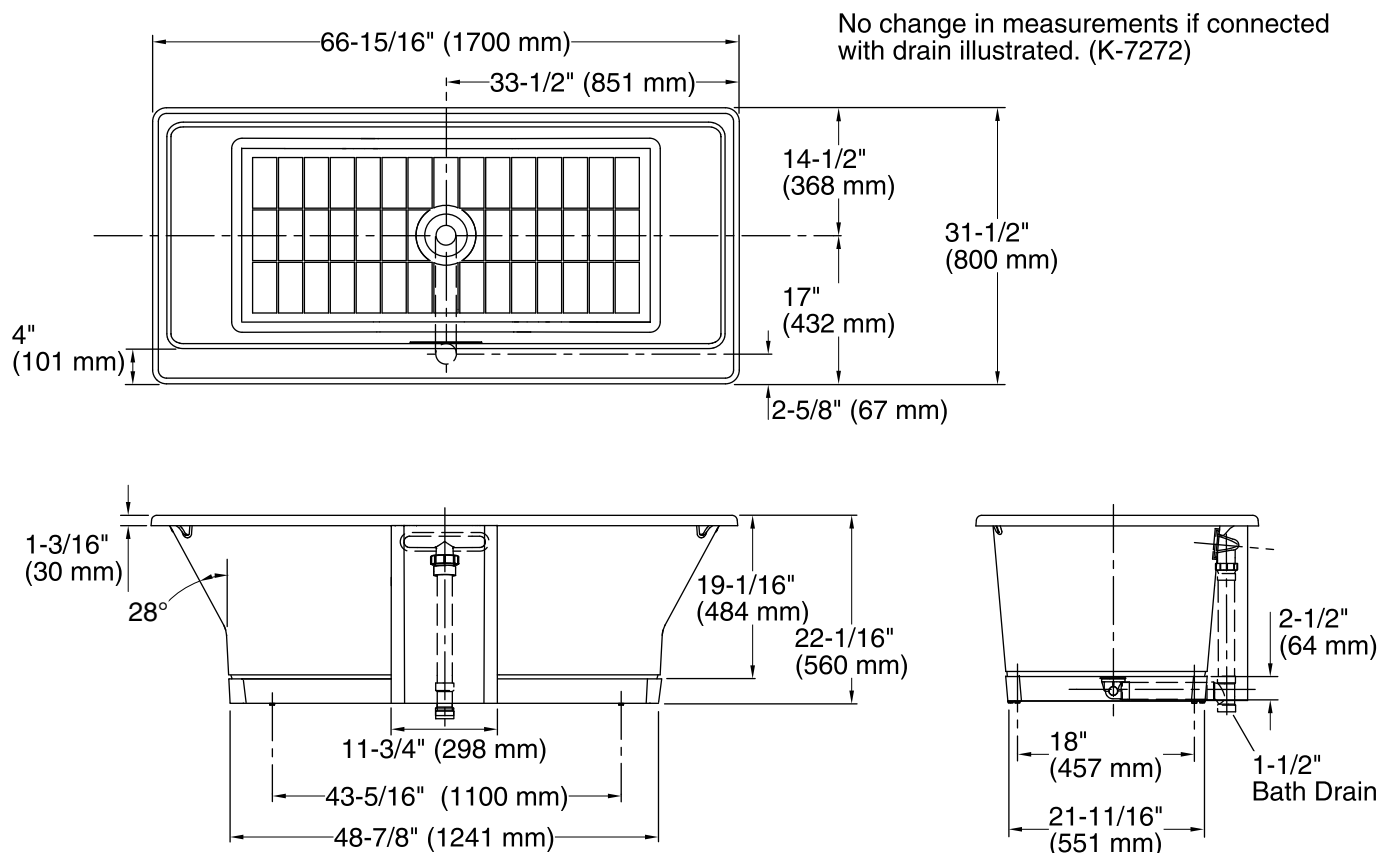

## Technical Information

All product dimensions are nominal.

|                     |   |
|---------------------|---|
| Installation:       | Freestanding                                      |
| Drain location:     | Center  |
| Basin area, bottom: | 49" x 22" (1245 mm x 559 mm)                      |
| Basin area, top:    | 62-1/2" x 24-3/4" (1588 mm x 629 mm)              |
| Weight:             | 365 lbs (165.6 kg)                                |
| Minimum floor load: | 70 lbs/ft <sup>2</sup> (341.8 kg/m <sup>2</sup> ) |
| Water depth:        | 15-1/4" (387 mm)                                  |
| Water capacity:     | 75 gal (283.9 L)                                  |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.