

### Features

- Brass construction.
- Wall-mount installation.
- Single-handle.
- Lever handle.
- Stationary spout.
- Less drain.
- Requires single-handle ceramic valve [K-307-K].
- Available with an 8-1/4" (210 mm) spout from wall to center of drain.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

### Required Products/Accessories

K-307-K Wall-mount Bathroom Sink Valve

### Optional Products/Accessories

K-7114 Pop-Up Drain  
K-7124 Pop-Up Clicker Drain  
K-7127 Drain  
K-7129 Drain



ADA CSA B651 OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	PB	Vibrant® Polished Brass
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze

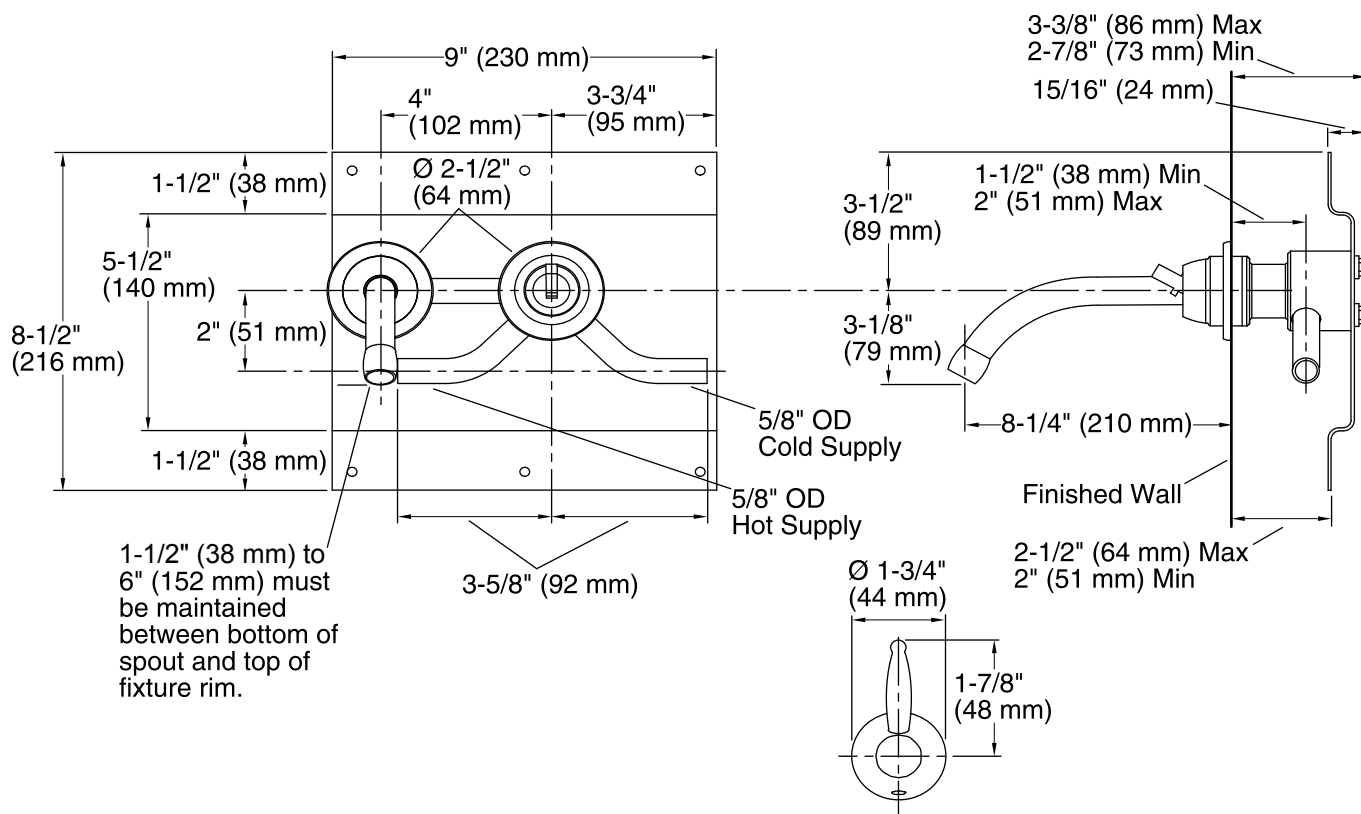

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

#### Spout:

Spout reach: 8-1/4" (210 mm)

### Notes

Install this product according to the installation guide.

Install the wall-mount valve according to the valve installation guide.

One 1-7/8" (48 mm) diameter cutout hole is required for the spout. One 1-7/8" (48 mm) diameter cutout hole is required for the handle.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.