

# Coralais® Rite-Temp® Shower Valve Trim K-TS15611-4H

#### **Features**

- Includes face plate with handle, shower arm with flange and showerhead.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Includes single function 1.5 gpm (5.7 l/min) showerhead.
- Showerhead features MasterClean<sup>™</sup> sprayface for easy cleaning.
- Complements the Coralais faucet and accessory collections.

### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

### Installation

Trim set requires valve to complete installation.

# **Required Accessories**

K-304/K-P304 Series Rite-Temp® Valves

01

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

### **Optional Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies







## Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	СР	Polished Chrome
	G	Brushed Chrome





# Coralais® Rite-Temp® Shower Valve Trim K-TS15611-4H

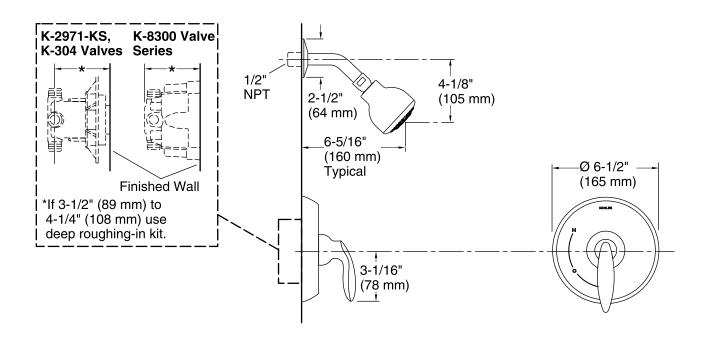

## **Technical Information**

All product dimensions are nominal.

### **Showerhead:**

Rated maximum flow: 1.5 gal/min (5.7 l/min)
Pressure: 80 psi (5.5 bar)

### **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

