



Charlemont™

72" bathroom vanity cabinet with sinks and quartz top
K-29264-BD1

Features

- Set includes cabinet, precut quartz vanity top, backsplash, sinks, cabinet hardware
- Convenient tilt-down drawer under each basin for storing smaller, frequently-used items
- Four full-extension 17" (432 mm) drawers with soft-close side-mount slides
- Three-way adjustable slow-close door hinges for easy cabinet access
- 20" (508 mm) cabinet interior provides ample storage space
- Finish-matched cabinet interior offers generous clearance for plumbing
- Vanity top has 8" (203 mm) widespread faucet holes; requires deck-mount faucets (sold separately)
- Vibrant® Brushed Nickel hardware included on White vanities, Vibrant Brushed Moderne Brass hardware on Ferrous Grey and Tidal Blue vanities, and Matte Black hardware on Light Oak vanities
- White quartz (GWT) vanity top and backsplash add beauty and long-lasting durability



Material

- Vitreous china sinks
- Solid wood and moisture-resistant MDF

Installation

- Separate vanity top makes for simplified installation
- Easy installation – no special tools required

Recommended Products/Accessories

K-33585 Drawer organizer set

Codes/Standards

ASME A112.19.2/CSA B45.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

	0	White
	DWG	Ferrous Grey
	TDB	Tidal Blue
	WEK	Light Oak

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada

6-6-2025 21:52 - US/CA

THE BOLD LOOK
OF **KOHLER**®



Charlemont™
72" bathroom vanity cabinet with sinks and quartz top
K-29264-BD1

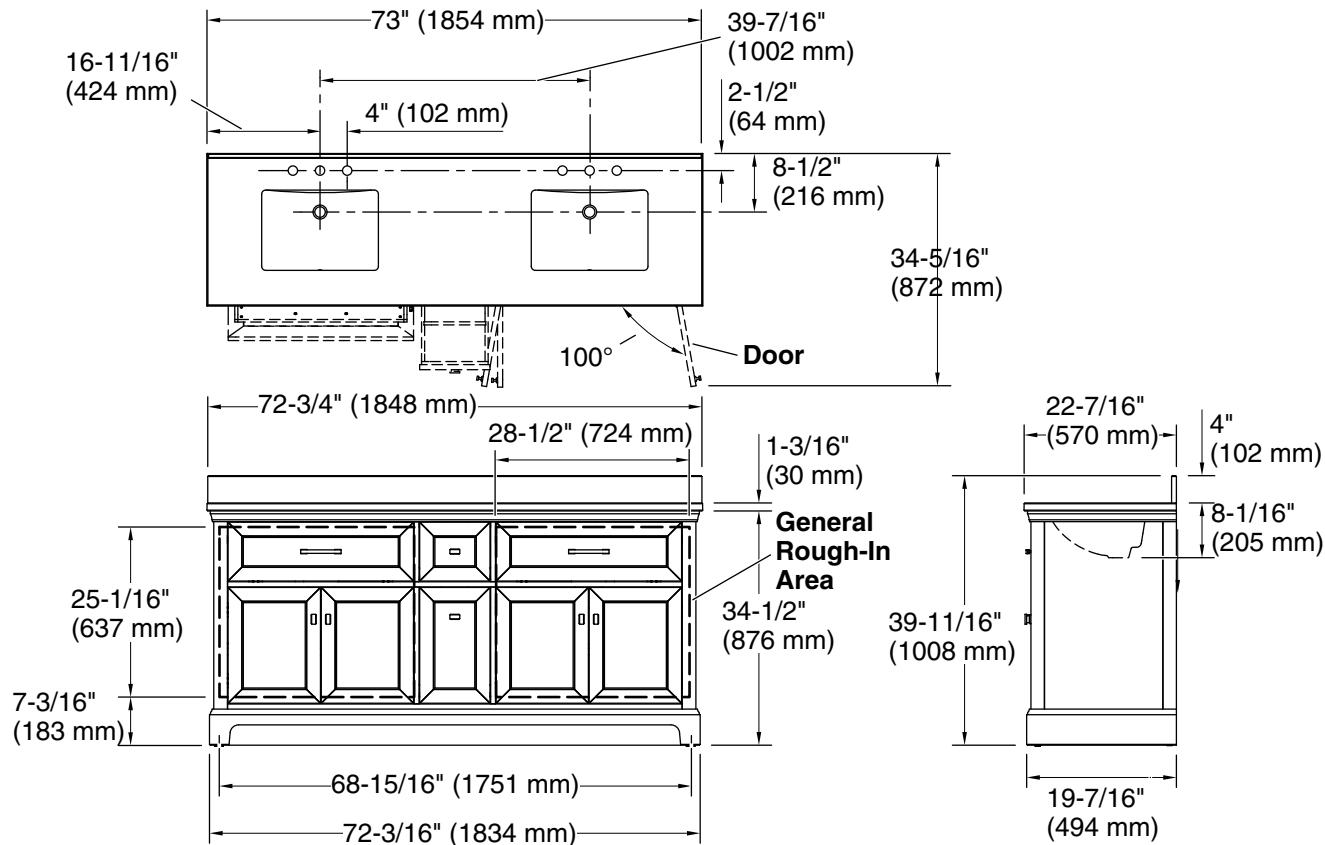

Technical Information

All product dimensions are nominal.

Lighting included: No

Notes

Install this product according to the installation instructions.

Select the type of fastener based upon the wall material. Two 250 lb (113.4 kg) minimum load bearing fasteners are recommended.