



**Statement™**

76" H pivot shower door with 5/16"-thick glass

**K-CA37600-8L**

## Features

- Premium stainless steel hinge design allows for effortless opening and closing of the pivot panel
- Controlled Close® innovative soft-close with spring-dampening technology eliminates slamming and brings door to a secure close
- Frameless design emphasizes glass and creates a sleek, minimalist look
- Back-to-back 14-7/16" (367 mm) vertical handles
- Tempered glass ensures enhanced safety and durability
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- SealNetik™ full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Smooth, easy-to-clean wall jambs
- Pivot shower door configuration consists of one moving panel and one stationary panel
- Coordinates with other products in the Statement™ collection

## Material

- Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

## Installation

- Fits opening widths 54" – 60" (1372 – 1524 mm)
- 76" (1930 mm) high, with a lofty 74-5/16" (1888 mm) minimum head clearance
- 6" (152 mm) width adjustment
- 3/4" (19 mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout



## Codes/Standards

ANSI Z97.1  
CAN/CGSB-12.1  
CPSC 16CFR 1201

## Kohler® Bath and Shower Doors Commercial One-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color    Code    Description

	SHP	Bright Polished Silver
	2MB	Vibrant® Brushed Moderne
	BL	Brass
	BNK	Matte Black

## Available Glass Options


### Code    Description

L	Crystal Clear
---	---------------



**Statement™**

76" H pivot shower door with 5/16"-thick glass  
**K-CA37600-8L**

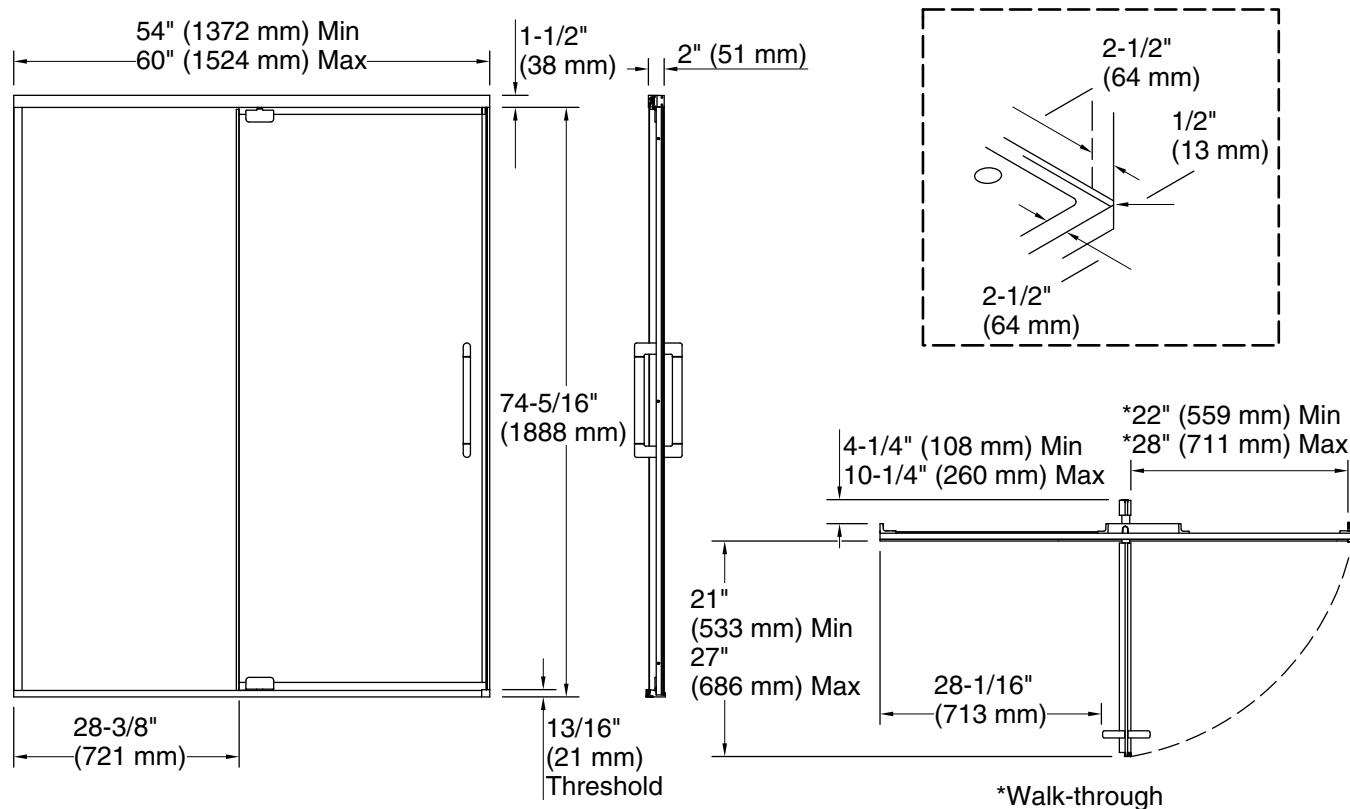

## Technical Information

All product dimensions are nominal.

Base-To-Wall 1/2" (13 mm)

Radius – Max:

Shower Ledge Min 2-1/2" (64 mm)  
Flat:

Shower Wall Min 2-1/2" (64 mm)  
Flat:

## Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 76-3/4" (1949 mm) to allow for installation clearance.