



PRODUCT NAME: WILLOW

ITEM NUMBER: 26286ICSG

Please consult your electrician for hanging fixture and wiring.



G9 11X40W (Bulb included)

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.



Mounting Strap (A)



Body (B)



Canopy (C)




Nut (D)



Bulb (F)


Locate all hardware & components before discarding packaging

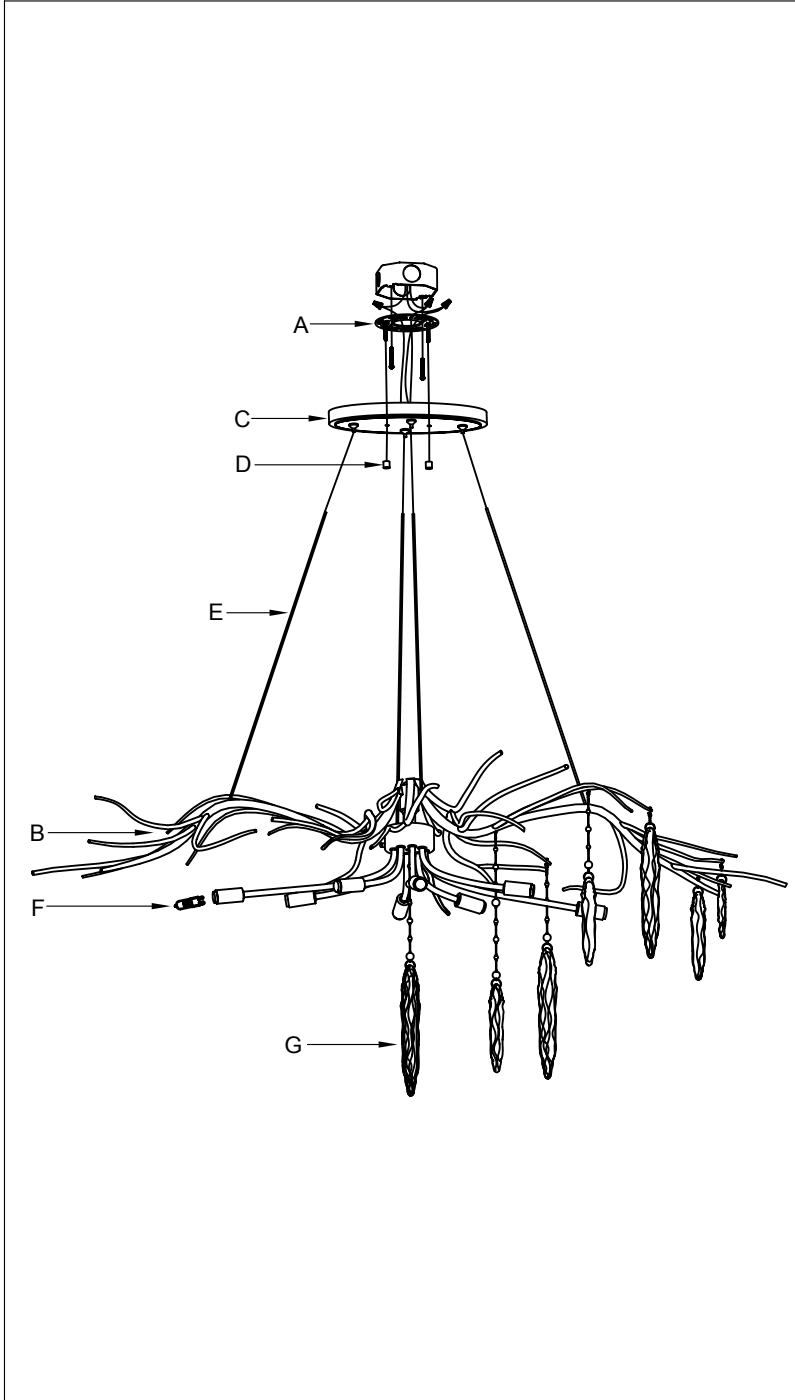

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.


1.

(A)




Step.1 Remove mounting bracket (A) from fixture and install to electrical box.

2.

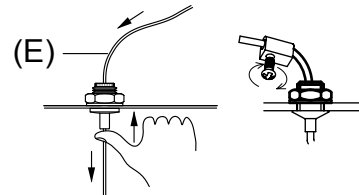


Step.2 Press the wire restraint to adjust the desired length of cable. Secure the cables.

3.

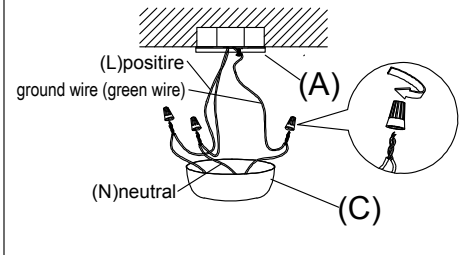



Step.3 Wire fixture to wires in outlet box. Green wire is fo Ground.



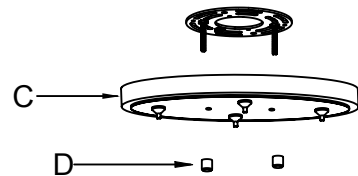




4.

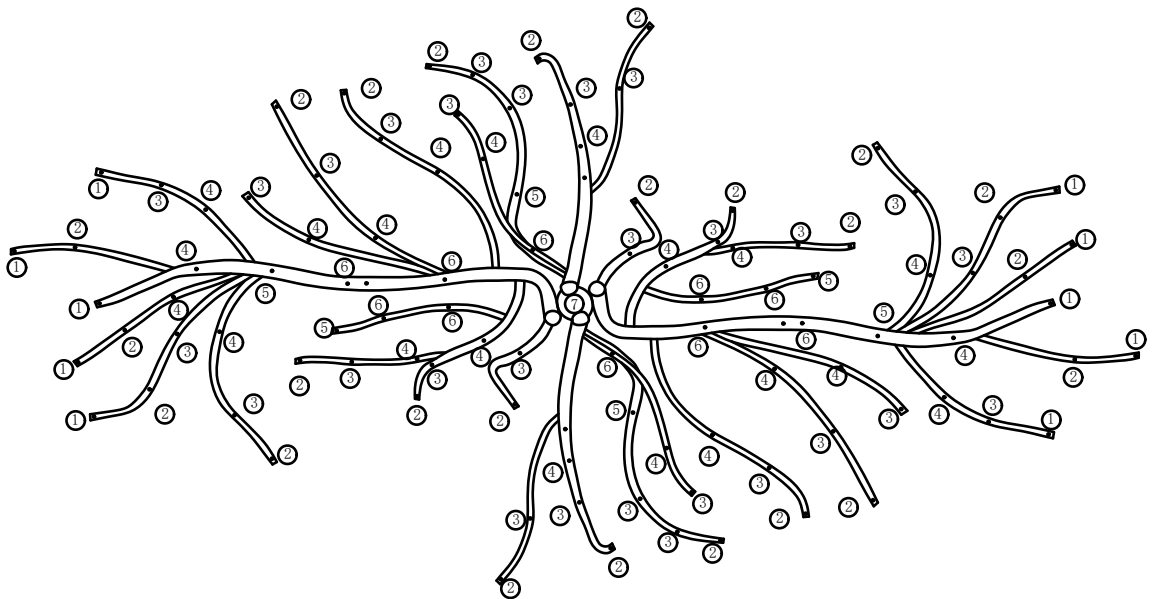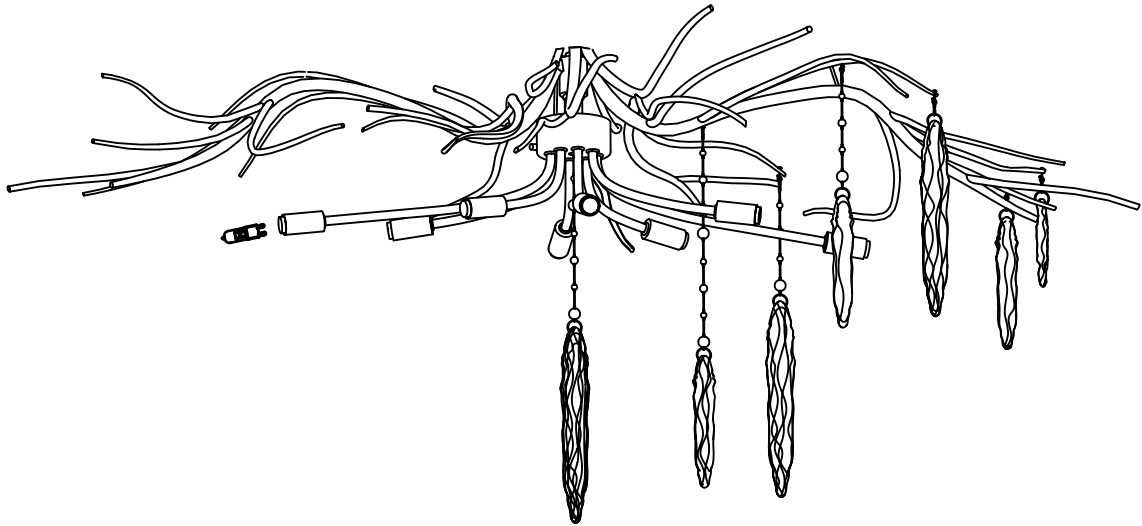

Step.4 Install body (B) to Mounting Strap (A) and tighten Screw (D) through the hole of canopy (C) on the Mounting Strap (A).

IMPORTANT: Glass mounting



G						
CRI2628XIC-4.75	CRI2628XIC-6.5	CRI2628XIC-9.5	CRI2628XIC-11	CRI2628XIC-14	CRI2628XIC-16	CRI2628XIC-18.75
① 	② 	③ 	④ 	⑤ 	⑥ 	⑦ 
10pcs	24pcs	28pcs	22pcs	6pcs	10pcs	1pcs