



PRODUCT NAME: WILLOW


ITEM NUMBER: 26288ICSG

Please consult your electrician for hanging fixture and wiring.



G9 12X40W (Bulb included)

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.



Mounting Strap (A)



Body (B)



Canopy (C)





Nut (D)




Bulb (F)

Locate all hardware & components before discarding packaging

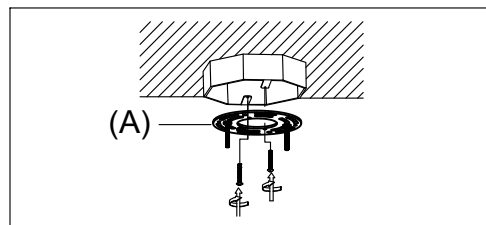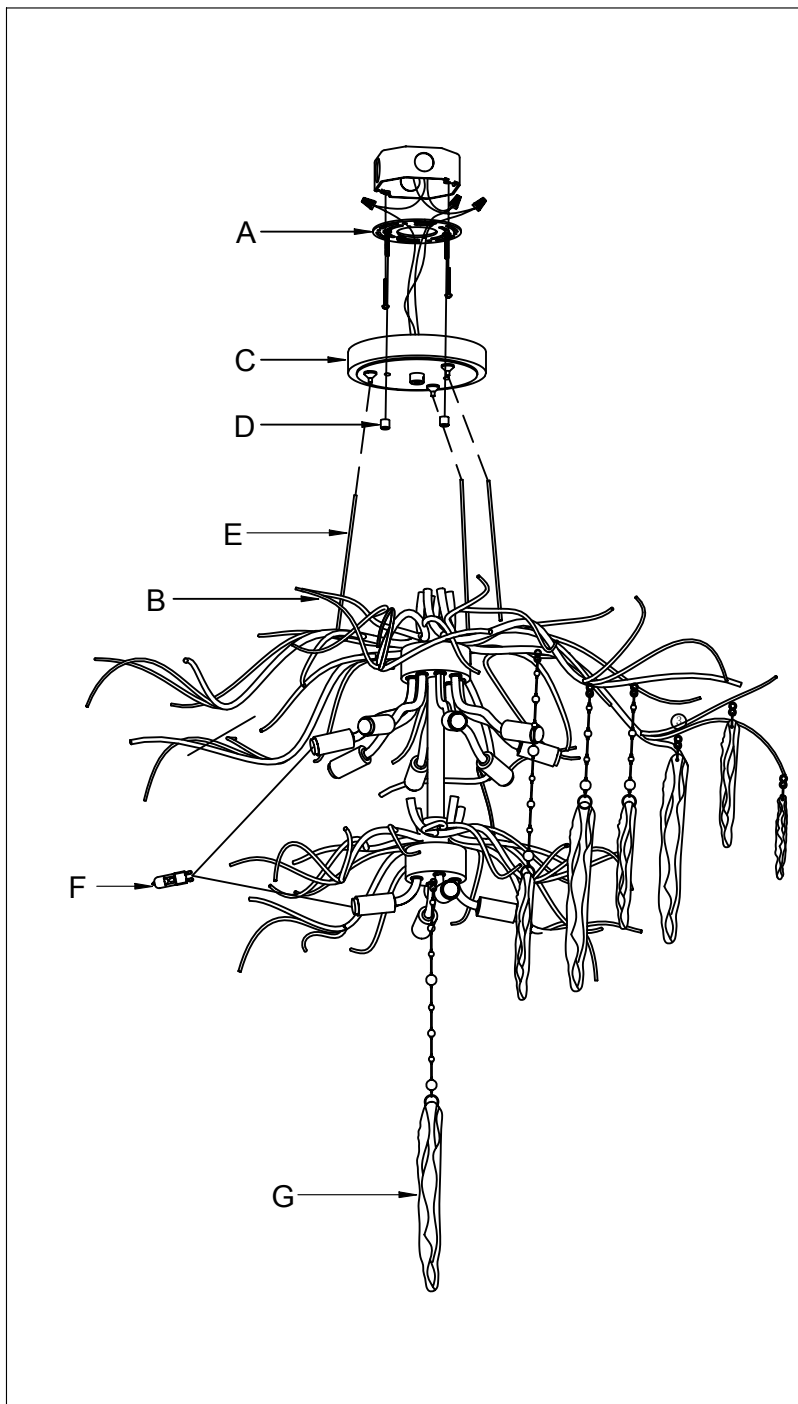


1.

Step.1 Remove mounting bracket (A) from fixture and install to electrical box.

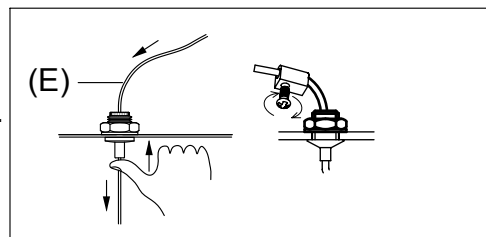


2.

Step.2 Press the wire restraint to adjust the desired length of cable. Secure the cables.

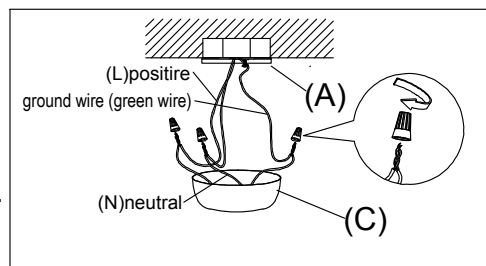

3.

Step.3 Wire fixture to wires in outlet box. Green wire is for Ground.

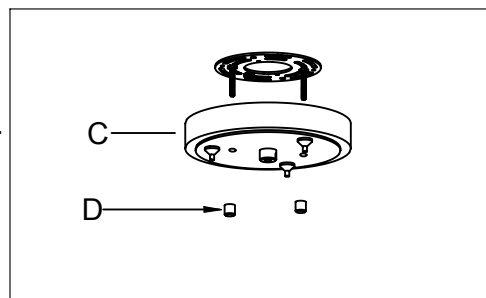


4.


Step.4 Install body (B) to Mounting Strap (A) and tighten Screw (D) through the hole of canopy (C) on the Mounting Strap (A).

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.


IMPORTANT: Glass mounting

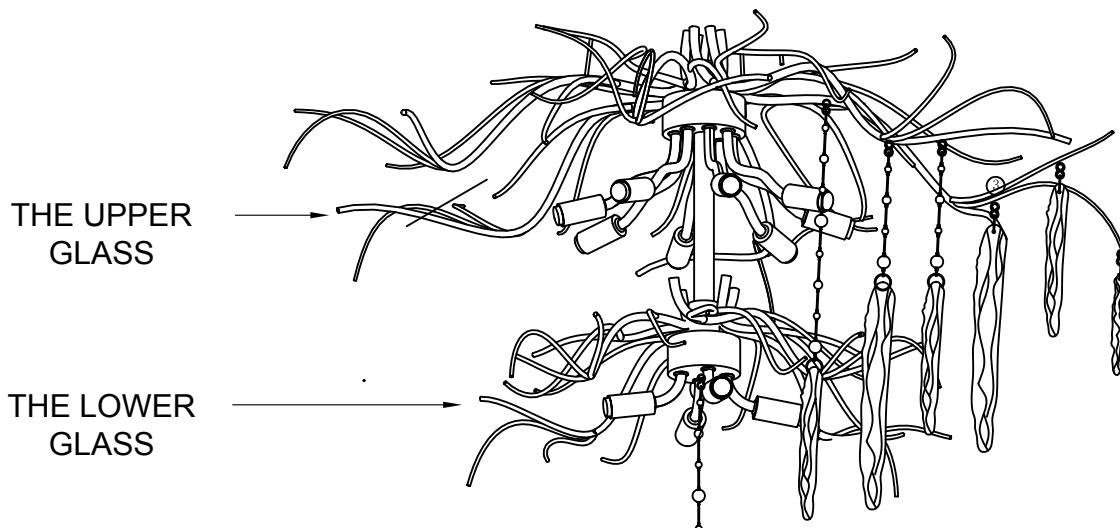

G						
CRI2628XIC-4.75	CRI2628XIC-6.5	CRI2628XIC-9.5	CRI2628XIC-11	CRI2628XIC-14	CRI2628XIC-16	CRI2628XIC-18.75
①	②	③	④	⑤	⑥	⑦
30pcs	42pcs	14pcs	36pcs	18pcs	26pcs	1pcs

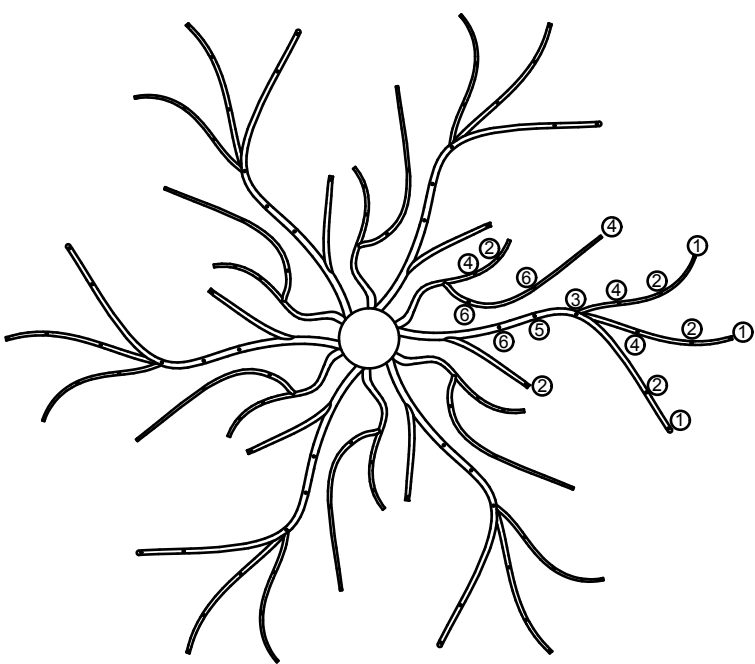

THE UPPER GLASS

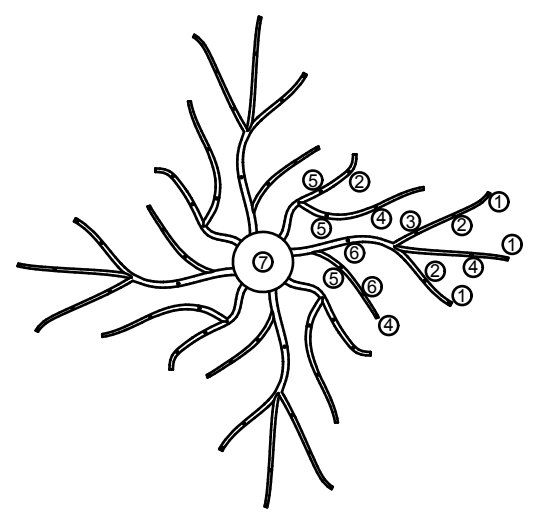

THE LOWER GLASS