DARLING | FANDELIGHT

61022

- Dimmable only at 120V with Triac
- 80+ CRI
- Wifi Enabled

Job Name : _____
Job Type : _____
Quantity : _____
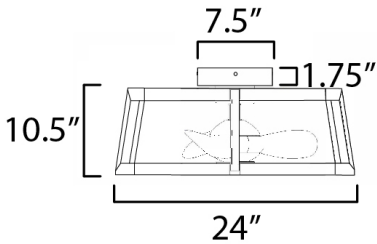Comments : _____

FCT6000WT (Included)

FANDELIGHT™
Wall Remote Magnetically Connect to Wall Plate. Light Dimming and CCT Tuning* Battery Operated

PRODUCT DESCRIPTION

For those with smaller spaces in need of a fan, look no further than this Darling Fandelight. Eliminating the fan rod of a typical fandelight, this is the first hugger Fandelight that provides stylish trends with a low profile integrated fan. The combination finish of Natural Aged Brass, Matte Black, and the white fan blades make this a design that delivers trend, not just functionality. Fully dimmable and the Fandelight features can be controlled by the attractive remote provided or through its Wifi-enabled technology.

FINISHES:
BLACK /NATURAL AGED BRASS (WTBKNAB) w/White Blades

GLASS
White WT

MATERIAL
Steel + Aluminum Body
ABS Blades

RATINGS
cETLus
Damp Location

ADDITIONAL
RATED LIFE 30000 Hours
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)

7.5"
1.75"
10.5"
24"

ITEM#	LAMPING	DIMENSIONS	LUMENS RATED	DEL	WEIGHT	BLADES	BLADE PTICH
61022	120V, (4) x 7.25W, 29W Total, LED 3000K	D24" X 10.5"H	3,400	2,200	19.4 lb	(3) x ABS (Included)	12

Energy Information at High Speeds		
AIRFLOW CFM	AIRFLOW EFFICIENCY	ELECTRICITY USE
1130 CFM	50 CFM / W	22.6W

ENERGYGUIDE

Estimated Yearly Energy Cost
$6
$3 $34
Cost Range of Similar Models (19" – 84")
- Based on 12 cents per kWh and 6.4 hours use per day
- **Your cost depends on rates and use**
- Energy Use: 22.6 Watts
All estimates based on typical use, excluding lights

Airflow
1130
Cubic Feet Per Minute
- The higher the airflow, the more air the fan will move
- Airflow Efficiency: 50 Cubic Feet Per Minute Per Watt

ftc.gov/energy

Always consult a qualified electrician before installing any lighting product.