


Specifications



SIP™ Transitional Beverage Faucet

Models: S5520 Series

NOTE: DESIGNED TO INSTALL THROUGH 1 HOLE, 1" (25MM) MIN. DIA.

FACUET DESCRIPTION

- Metal construction with various finishes identified by suffix.
- 3/8" compression inlet connection
- Compatible with S5500 Filtering System

OPERATION

- · Lever style handle
- Will operate with less than 5 lbs. of force

FLOW

• Flow is limited to 1.5 gpm

CARTRIDGE


• 1234 Duralock cartridge

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Meets CalGreen and Georgia SB370 requirements
- ADA (for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

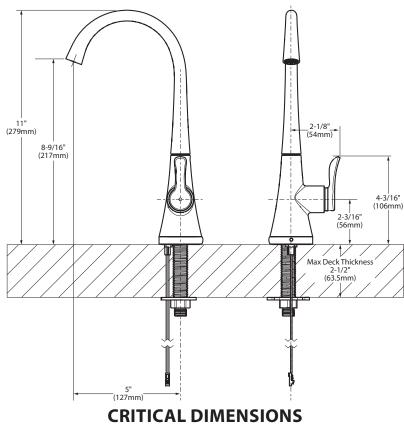

(DO NOT SCALE)