



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with chrome plated finish
- Pressure balancing cycle valve design with an adjustable temperature limit stop
- 1/2" IPS/CC connections
- Includes valve, showerhead, tub spout, arm and flange

## OPERATION

- Lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ\text{F}$  ( $\pm 2^\circ\text{C}$ )

## FLOW

- Showerhead is limited to 2.0 gpm (7.6 L/min), maximum 1.5 gpm (5.7 L/min) at 45 psi

## CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

## STANDARDS

- Third party certified to meet ASSE 1016, ASME A112.18.1/ CSA B-125.1, and all applicable requirements referenced therein
- Meets Watersense® criteria
- ADA ♿ for lever handle
- Meets New York City Local Law No. 57


## WARRANTY

- Limited lifetime warranty against leaks, drips, and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## DANIKA™ Posi-Temp® Single-Handle Tub/Shower

MODEL: 82833

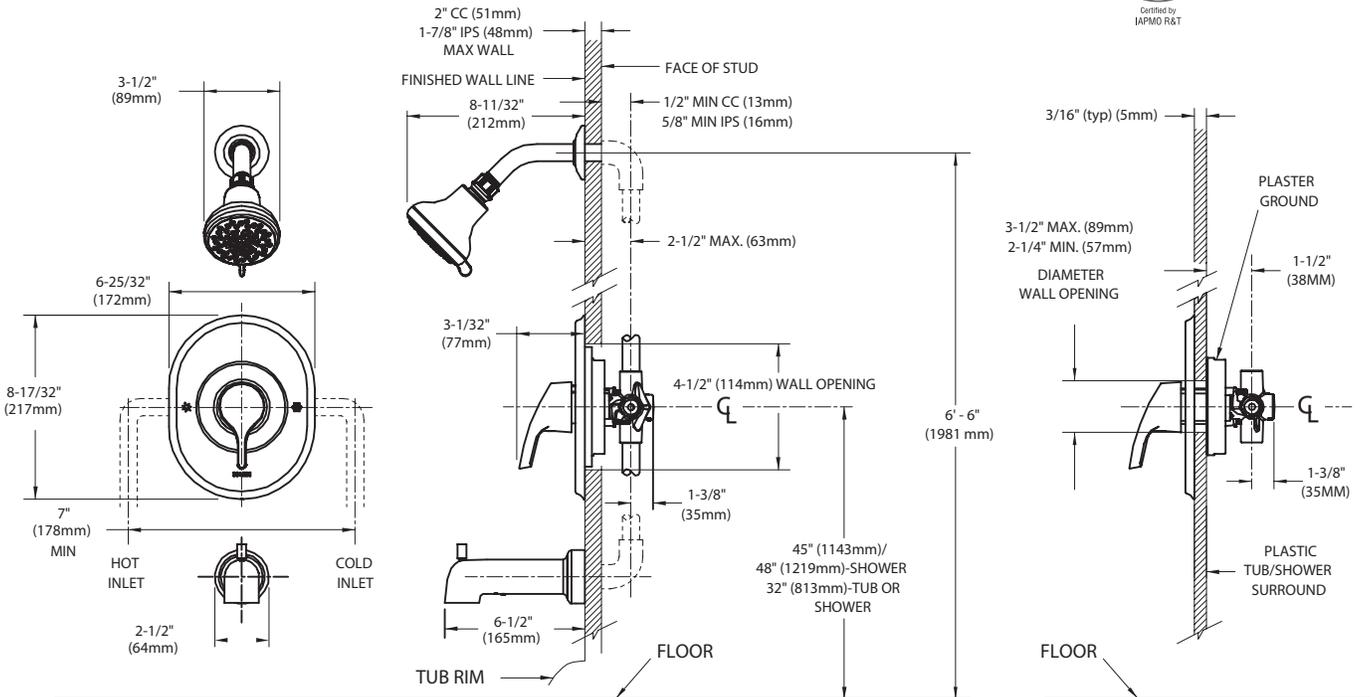

## CRITICAL DIMENSIONS

(DO NOT SCALE)