

MOEN®

DESCRIPTION

- Various finishes identified by suffix
- Designed using ocean recycled plastic
- Magnetix™ technology features an innovative magnetic docking system
- Includes rainshower, handshower, hose and magnetic docking system
- 60" double interlock spiral metal hose (for 220C4EP series)
- 72" double interlock spiral metal hose (for 220C5 series and 220C5EP series)
- 1/2" IPS connections
- Assembled with 2 check valves for backflow prevention for 220C5 and 220C5EP series

OPERATION

- Infiniti™ dial allows users to precisely adjust to their preferred balance of force and coverage
- 3-way diverter provides ability to flow each shower head separately or combined for more coverage
- Pause/trickle function allows to momentarily pause the handshower flow
- Pivoting rainshower allows user to tilt rainshower 40 degrees forward and backwards

FLOW


- Designed to deliver 2.5 gpm (9.5 L/min) MAX at 80 psi (for models manufactured after 3/1/18)
- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi (for models manufactured before 3/1/18)
- EP suffix models are limited to 1.75 gpm (6.6 L/min) MAX at 80 psi

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- Visit www.moen.com/support for complete details and limitations

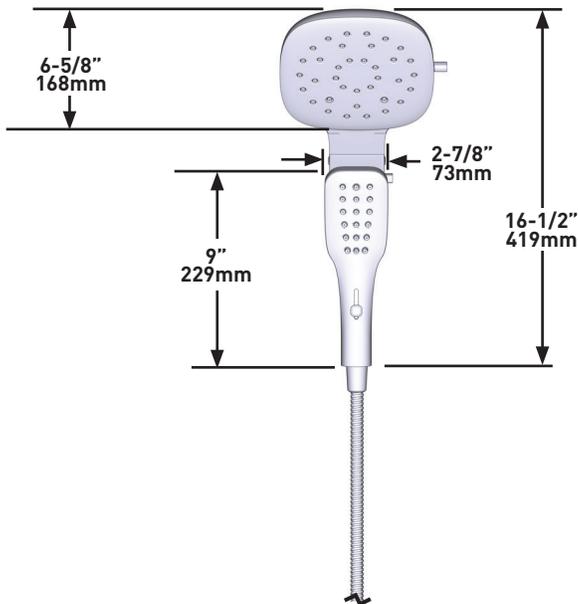


SPECIFICATIONS



Verso™

Square Rainshower/Handshower Combination with Infiniti™ dial and Magnetix™ Docking

MODELS: 220C4EP series, 220C5EP series, 220C5 series

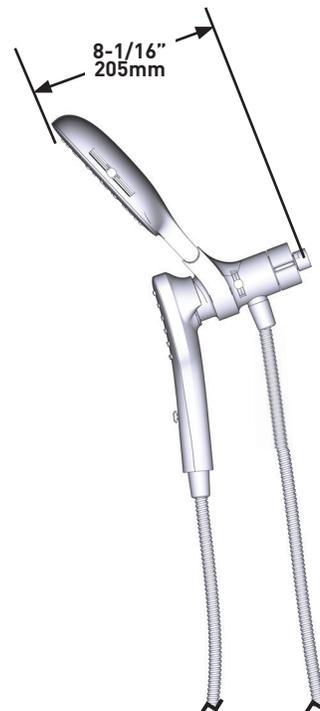

CRITICAL DIMENSIONS DO NOT SCALE