
INSTALLATION INSTRUCTIONS JACOBEAN SINGLE HOLE KITCHEN FAUCET WITH SIDE SPRAY Model No's: 2470-5313

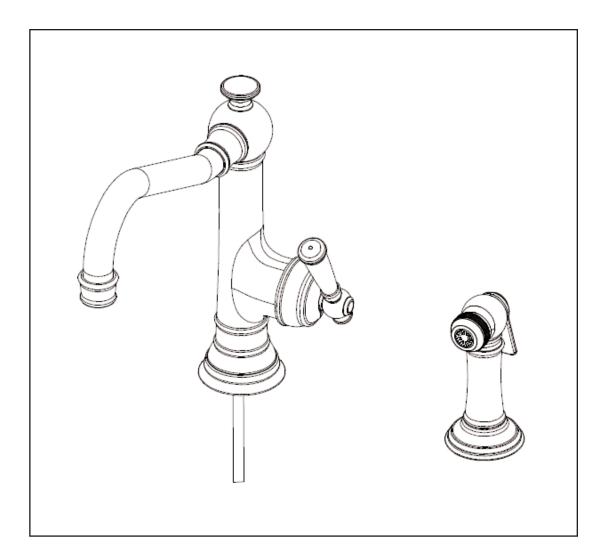

Congratulations on the purchase of your Newport Brass product, an excellent choice, that will give you years of quality service and enhance the look and style of your home.

Recommended Installation by a Professional Plumbing Contractor


Note: The use of petroleum base plumbers putty on our products will nullify the warranty. We recommend the use of clear silicone sealing materials.


If mounting faucet to stainless steel rim, an under-mount support, (e.g. wood, appropriate size \times 1/2" thick), should be utilized.


- Drill hole in mounting surface. Recommended deck hole Ø1.500" not to exceed Ø1.562".
- 2. Place O-ring (2) on underside of base RING (1). See Figure 1a.
- Insert Hoses through base RING (1) and hole in mounting surface.
 Secure into place with MOUNTING KIT (3). See Figure 1.
- 4. Attach hot/cold spout supply directly to valves in the wall. See Fig. 2
- 5. With faucet in the OFF position, open water supplies valves.

Inspect connections under sink for leaks. **DO NOT** turn faucet on yet.


6. Connect female connector of SIDESPRAY HOSE (4) to main body SIDESPRAY OUTLET male adaptor (5) **See Fig. 3.**

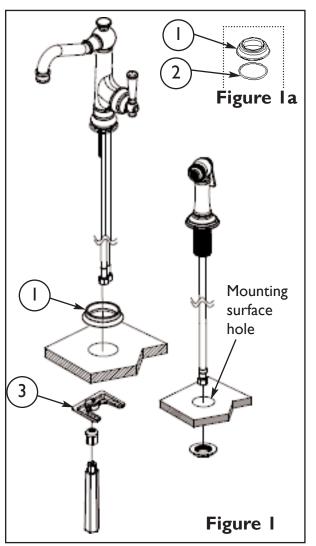

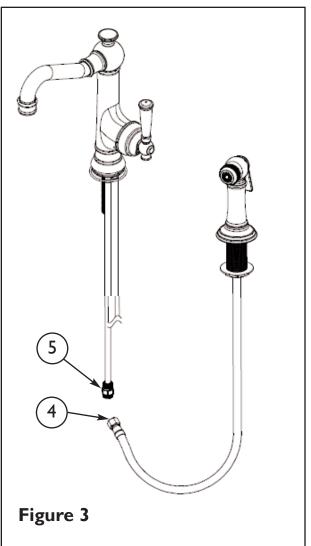



NWP-2470-5313 REV A

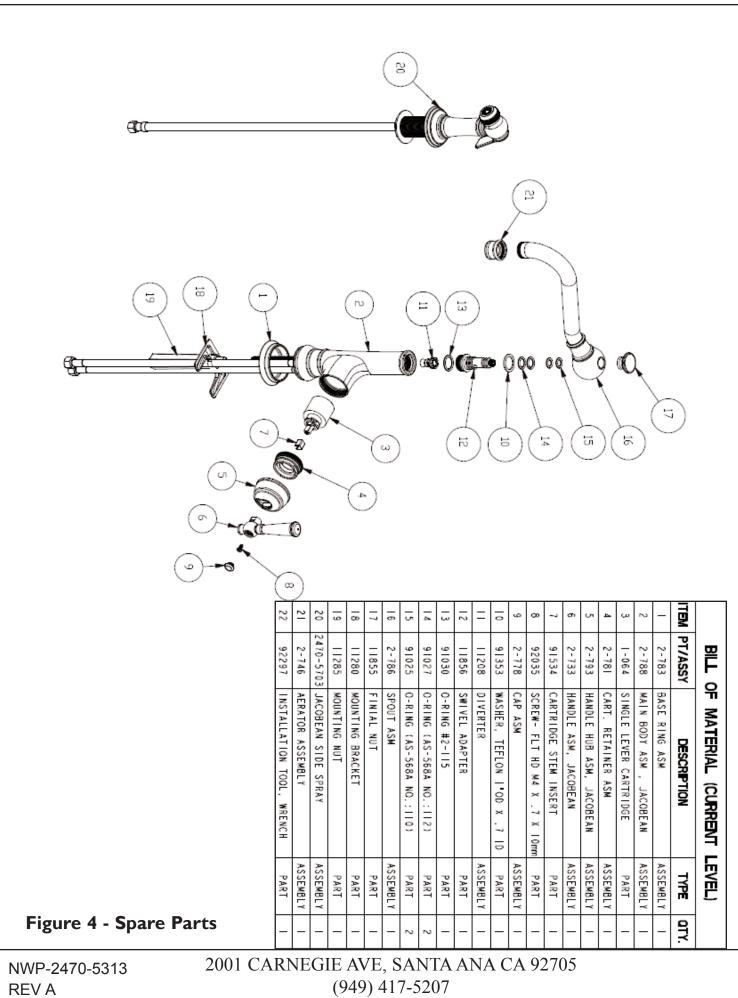

WWW.NEWPORTBRASS.COM