

Features

- Solid brass construction
- ADA compliant contemporary lever handles
- 7-1/4" (18.4 cm) spout length
- 1/2" NPT spout inlet fitting
- Intended for use with Newport Brass rough valve as specified (Required Accessory)
- Rough valve incorporates a brass valve body assembly
- Rough valve incorporates quarter-turn washerless ceramic disc valve cartridges

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- ADA
- ICC/ANSI A117.1
- All applicable US Federal and State material regulations



Wall-Mounted Tub Trim



- Polished Nickel 15:
- 15S: Satin Nickel
- 26: Polished Chrome Oil Rubbed Bronze
- 10B:

• Other: Refer to the Newport Brass catalog for additional color/finish options.

Specified Model

Model	Description	Colors / Finishes	
3-2045	Wall-Mounted Tub Trim	□ 15 □ 15S □ 26 □ 10B □	Other

Required Accessory: Both trim, above, and rough valve, below, must be specified.

Application		Wall Lavatory Valvo	Tub Oply Valve*	Wall Lavatory Valvo
Application	Tub Only Valve*	Wall Lavatory Valve	Tub Only Valve*	Wall Lavatory Valve
Description	2-Cartridge Assembly with 16pt Spline		2-Cartridge Assembly with 20pt Spline	
Inlet/Outlet Size	1/2"	1/2"	1/2"	1/2"
Part Number	1-500	1-532	1-564	1-560
Image	NE			

* Plumbing code restrictions prohibit the use of the 1-500 for showers unless the 1-535 (Remote BP Valve) is installed upstream of the 1-500.

Product Specification:


The Wall-Mounted Tub Trim shall be made of solid brass construction. Wall-Mounted Tub Trim shall include ADA compliant lever handles and a 7-1/4" (18.4 cm) tub spout that incorporates a 1/2" NPT inlet fitting. Wall-Mounted Tub Trim shall be Newport Brass Model 3-2045/___ and Newport Brass rough valve shall be 1-500.

SECANT

3-2045

3-2045

Product Dimensions (units are in inches)

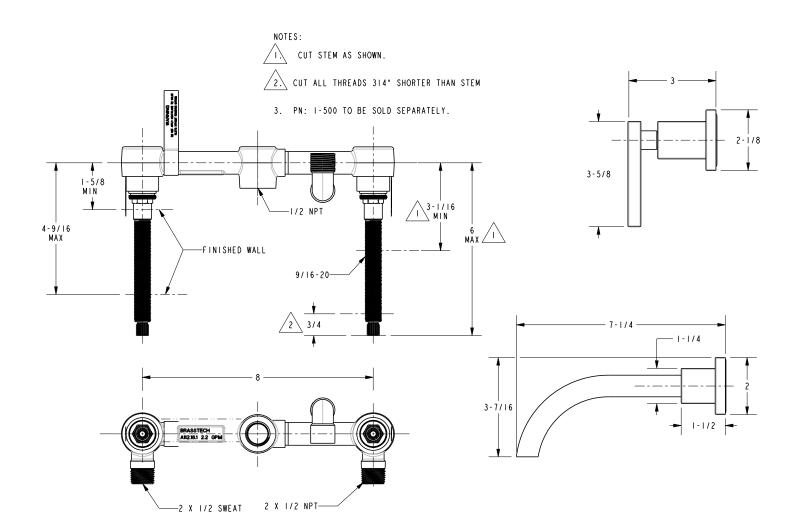



t: 949.417.5207 | www.newportbrass.com ©2011 Brasstech, Inc.

page 2 of 2 spec_3-2045