

- 1, 2, 3 or 4-Hole Installation Spout
- 2 Function Spray Head
- Concealed Sprayhead

Specifications

Features

- 1.8 GPM Flow Rate
- 1, 2, 3 or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- AutoDock™ Sprayhead Docking
- Concealed Sprayhead
- 360° Rotating Swivel Spout
- High Arc Spout
- Mounting Hardware Included
- Quick Install Tool
- Pfaster Connect™
- PVD Finish
- Soap Dispenser Included
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




Dimensions

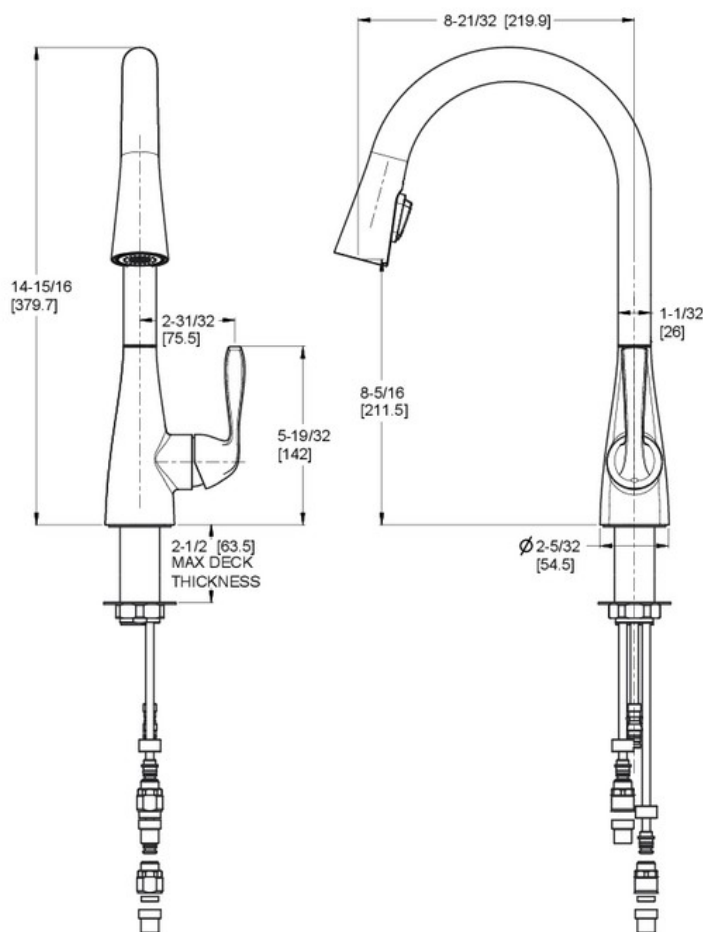

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Deckplate

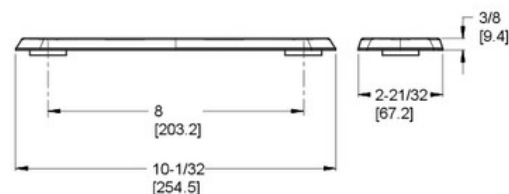

Top Filling Soap Dispenser

