


LG572-SAB Finish(B) ☐

LG572-SAC Finish(C) ☐

LG572-SAS Finish(S) ☐

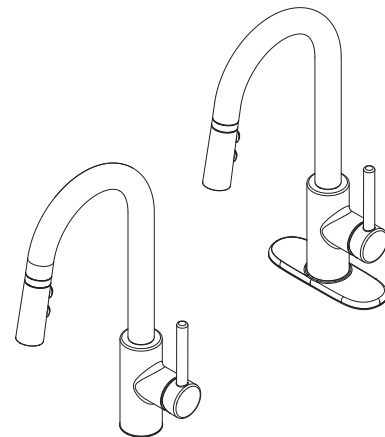

Specifications

- 1 or 3-Hole Installation
- Pforever Seal

Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- AccuDock™ Sprayhead Docking
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- CEC Compliant
- Cal Green Compliant
- NSF 61/9 Annex G (Low lead)



Dimensions

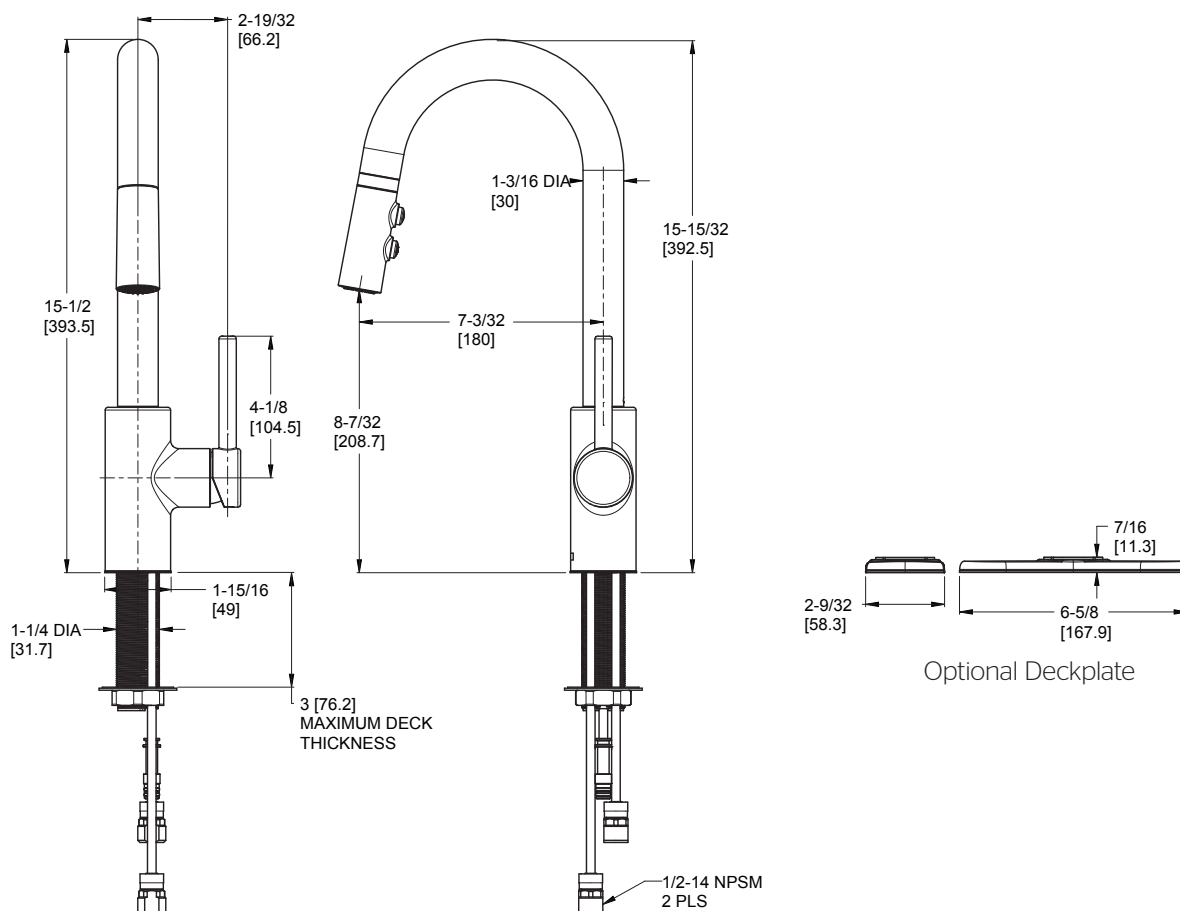

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings