


### Pull-Down Kitchen Faucet

- |   |   |
|---|---|
| GT529-COLC Finish(C) <input type="checkbox"/>   | GT529-COLD Finish(D) <input type="checkbox"/> |
| GT529-COLB Finish(B) <input type="checkbox"/>   | GT529-COLS Finish(S) <input type="checkbox"/> |
| GT529-COLBG Finish(BG) <input type="checkbox"/> | GT529-COLY Finish(Y) <input type="checkbox"/> |



## Specifications

### Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Single Hole Mounting or Optional Deckplate
- 2 Function Pull-Down Sprayer (Spray and Stream)
- 3/8" Connections
- 36" Integrated Nylon Braided Supply Lines
- 360° Rotating High Arc Spout
- 11.4" Pull-Down Hose Length
- AccuDock™ Sprayhead Docking

- Nylon Hose
- Forward Handle Operation
- Optional Deckplate, Order 961-273\* Separately
- Wipe Clean™ Nozzles
- Pfast Connect™
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty



- AccuDock™ Sprayhead
- Pforever Seal™


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

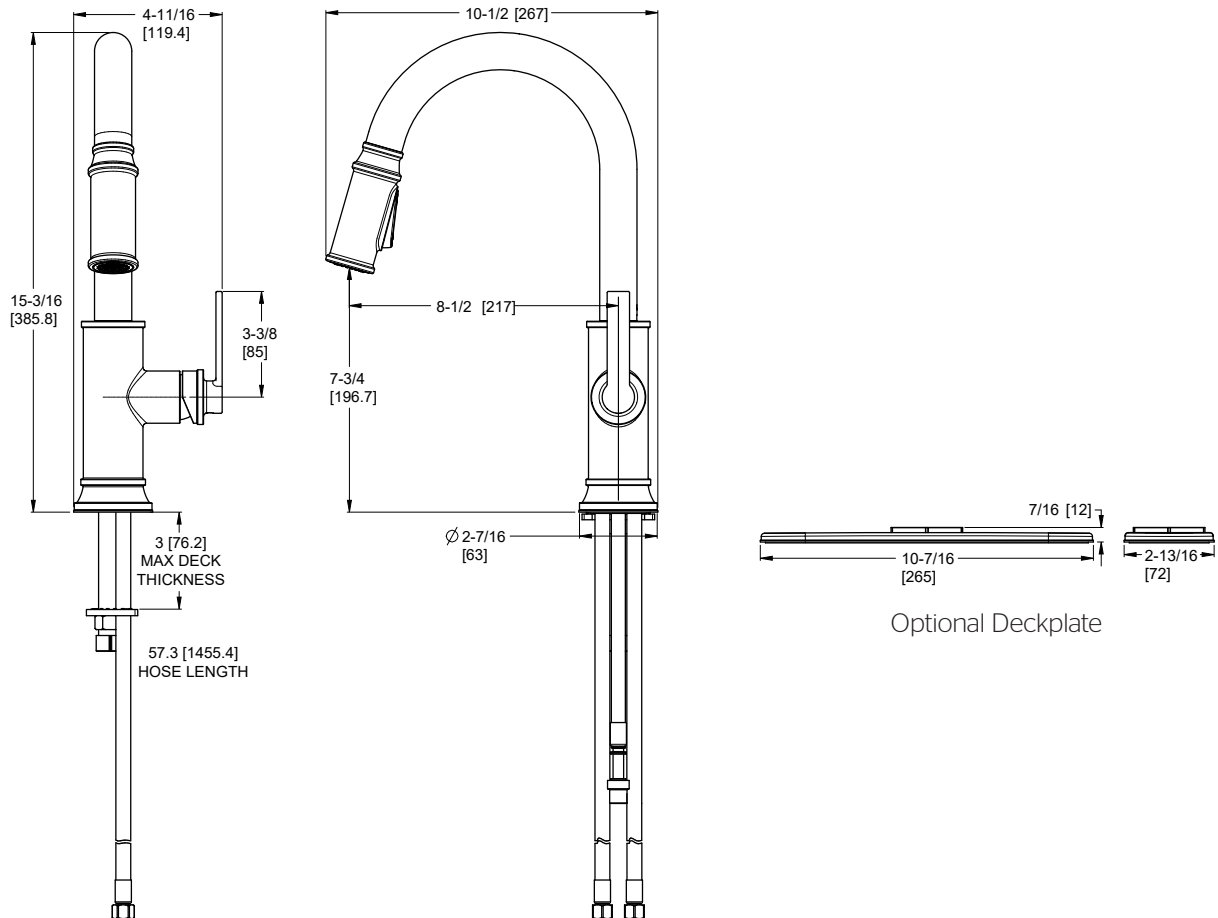

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings