


- LG49-MCAOB Finish(B) ☐
- LG49-MCAOC Finish(C) ☐
- LG49-MCAOGS Finish(GS) ☐
- LG49-MCAOY Finish(Y) ☐

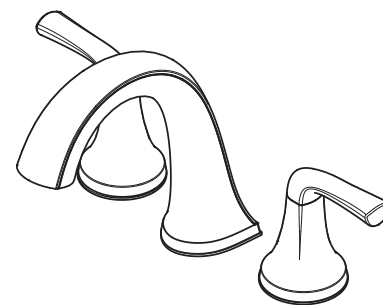

## Specifications

### Features

- 1.2 GPM Flow Rate
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Adjustable 3-Hole Installation
- Copper Inlet Line Kit Included
- Fixed Hubs
- Pfaster Connect™ Supply Lines
- TiteSeal™ Technology
- Push & Seal™ Pop-Up
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®

- Fixed Hubs
- Push & Seal™ Pop-Up
- Pforever Seal


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF 61/9 AnnexG Certified
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

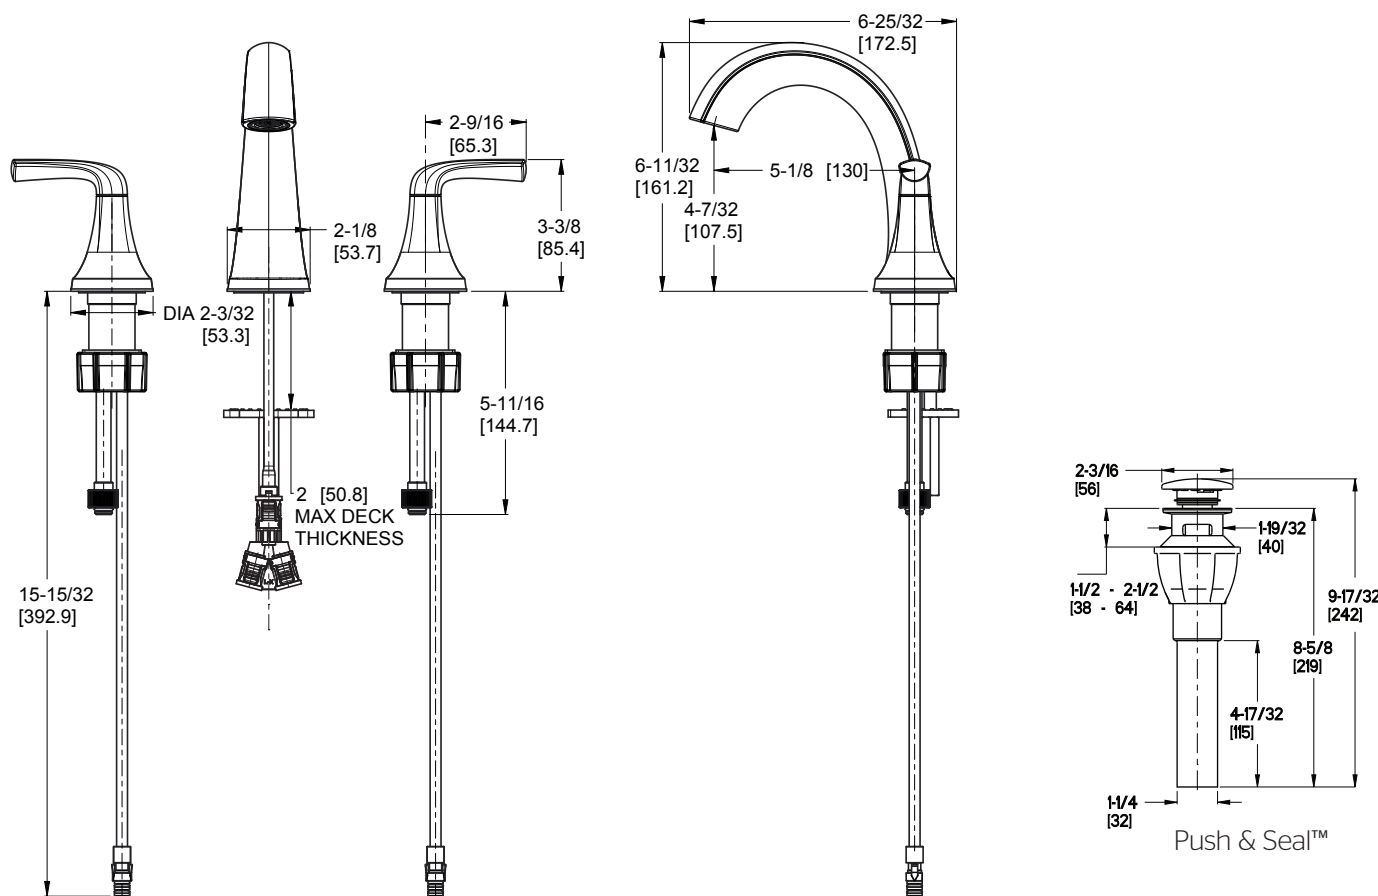

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings