


- LF-048-DMTC Finish(C)
 LF-048-DMTGS Finish(GS)
 LF-048-DMTSDB Finish(SDB)
 LF-048-DMTSDBG Finish(SDBG)



Specifications

Features

- 1.2 GPM Flow Rate
- Washerless Cartridges
- Fixed Hubs
- TiteSeal™ Technology
- Push & Seal™ Pop-Up
- Supply Lines Not Included
- Spot Defense™ Finish Resists Spots and Fingerprints (DMTC Excluded)
- Limited Lifetime Warranty



Code Compliance




Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

Optional Aerators Available	
GPM	Part Number
0.35 GPM	941-7109
0.5 GPM	941-7099
1.0 GPM	941-6630

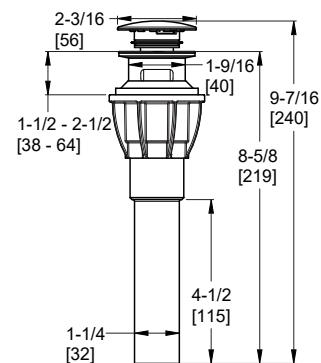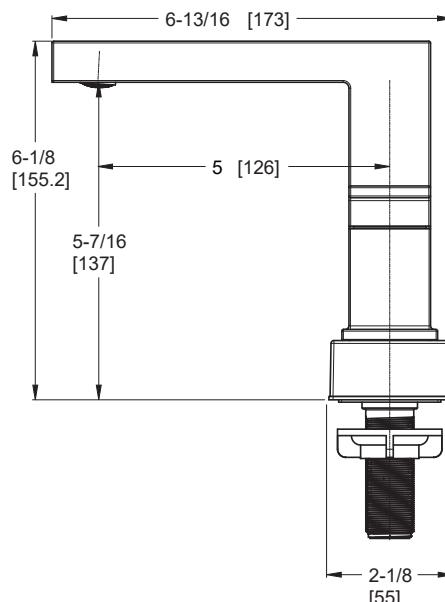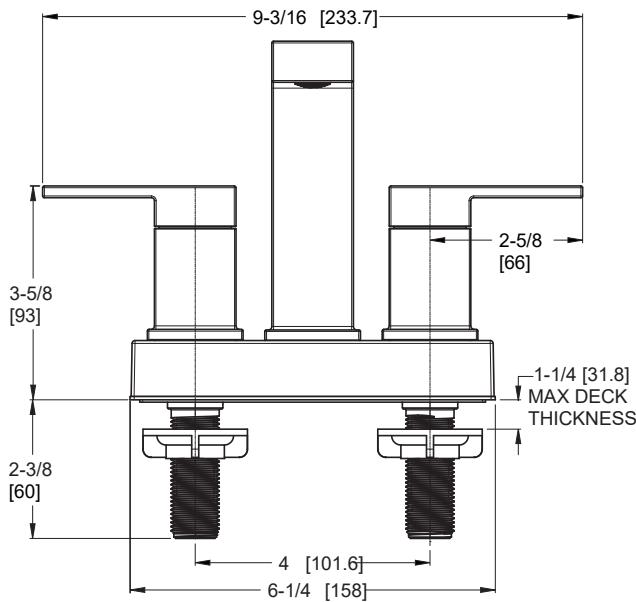

Push & Seal™

Ø1 Min to Ø1 1/2 Max. Deck Hole Openings