


- LF-049-DMTC Finish(C)
- LF-049-DMTGS Finish(GS)
- LF-049-DMTSDB Finish(SDB)
- LF-049-DMTSDBG Finish(SDBG)

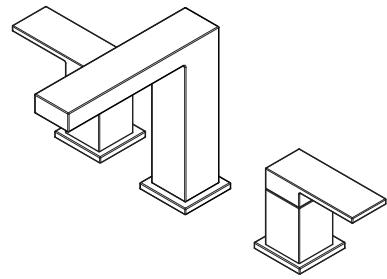

## Specifications

### Features

- 1.2 GPM Flow Rate
- Adjustable 3-Hole Installation
- Fixed Hubs
- Pfast Connect™ Adapter Technology
- Spot Defense™ Finish Resists Spots and Fingerprints (DMTC Excluded)
- TiteSeal™ Technology

- Push & Seal™ Pop-Up
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty



### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

