


LF-042-DMTC Finish(C)
 LF-042-DMTGS Finish(GS)
 LF-042-DMTSDB Finish(SDB)
 LF-042-DMTSDBG Finish(SDBG)

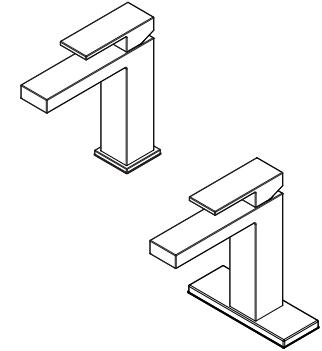

Specifications

Features


- 1.2 GPM Flow Rate
- All Metal Construction
- 1 or 3-Hole Installation, Optional Deckplate Included
- All Metal Push & Seal™ Drain
- Supply Lines Not Included
- TiteSeal™ Technology
- Pfast Connect™ Adapter Technology
- Spot Defense™ Finish Resists Spots and Fingerprints (DMTC Excluded)
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)

Dimensions

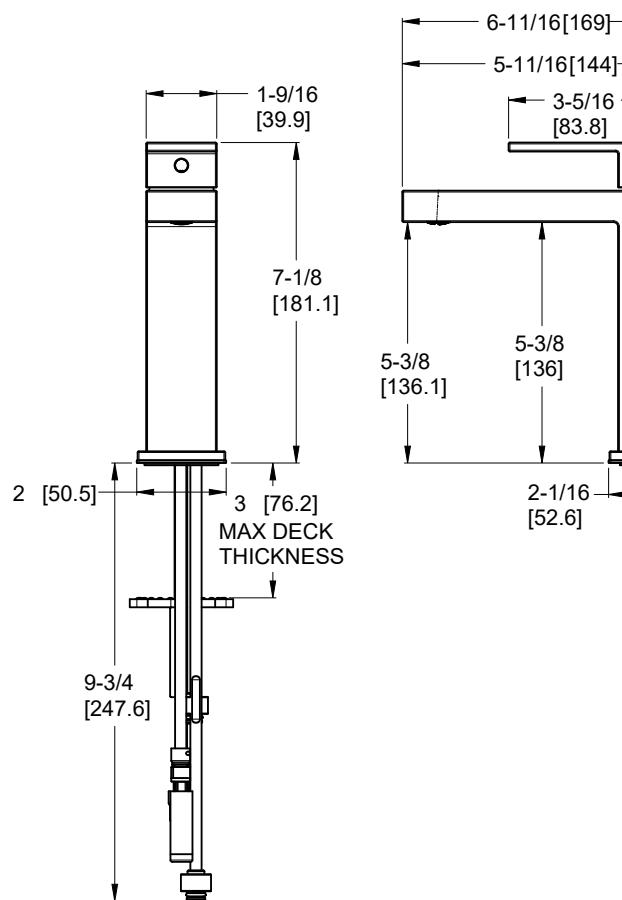


Ø1 Min to Ø1 1/2 Max. Deck Hole Openings

Optional Aerators Available	
GPM	Part Number
0.35 GPM	941-7109
0.5 GPM	941-7099
1.0 GPM	941-6630

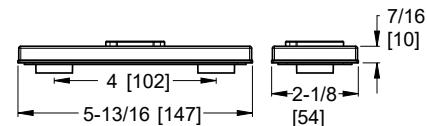

Optional Deckplate

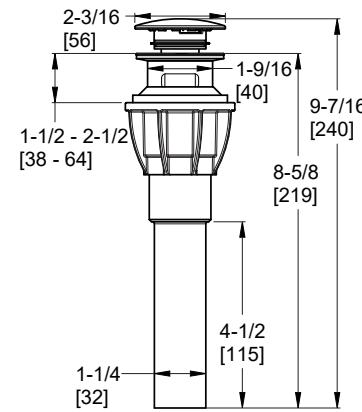

Push & Seal™