

## Description:

Fall in love with this innovative bath light. Classy, etched glass shades are aligned in a linear fashion. Each shade features a diffuser at its base constructed from glass. The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.

## Specifications:

- Etched glass Shades
- Classy, etched glass shades are aligned in a linear fashion.
- Each shade features a diffuser at its base constructed from glass.
- The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.
- Ideal for any bathroom.
- Perfect for transitional, modern, or contemporary settings.
- Measures 20-1/2-inch width by 5-inch height.
- Uses three integrated LED (10w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 6.3125 in W., 4.75 in ht., 0.75 in depth
- Mounting backplate for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant

## Performance:

Number of Modules	3
Input Power	10 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,508/50 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cETLus Damp Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2019


# P300291-009-30



## Dimensions:

Width: 20-1/2 in  
 Height: 5 in  
 Depth: 3-7/16 in  
 H/CTR: 2-1/2 in

Etched glass Shades  
 Width: 5-5/16 in  
 Height: 0-1/8 in

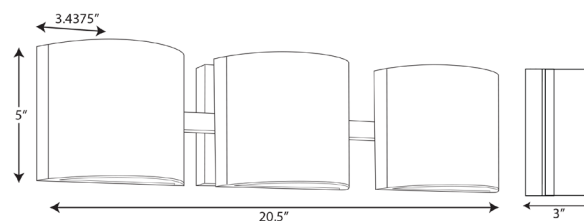


**Photometrics:**

# P300291-009-30

<b>ELECTRICAL DATA</b>	<b>P300291-009-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

**P300291-009-30**  
 LED Light Engine: 3000 K 90 CRI  
 System Wattage: 10  
 Fixture delivered lumens: 1488  
 Fixture Efficacy: 48.9  
 Spacing Criteria: 3.89 | 2.04 | 1.20

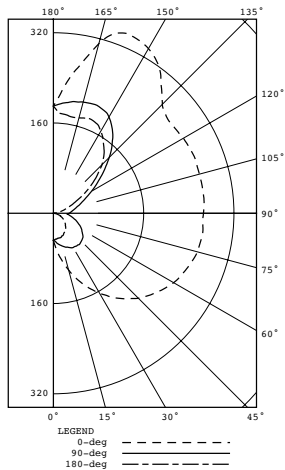

Test **19.01182** Test Date **06/25/19**

<b>CANDELA DISTRIBUTION</b>						<b>FLUX</b>
<b>CANDELA</b>	<b>DISTRIBUTION</b>					
	<b>0.0</b>	<b>45.0</b>	<b>90.0</b>	<b>135.0</b>	<b>180.0</b>	
<b>0</b>	48	48	48	48	48	
<b>5</b>	65	60	51	47	46	<b>5</b>
<b>15</b>	104	88	60	47	45	<b>19</b>
<b>25</b>	145	116	67	44	42	<b>37</b>
<b>35</b>	182	142	71	40	37	<b>57</b>
<b>45</b>	213	162	70	33	30	<b>75</b>
<b>55</b>	236	178	63	26	24	<b>90</b>
<b>65</b>	253	189	52	19	16	<b>100</b>
<b>75</b>	264	195	38	11	8	<b>104</b>
<b>85</b>	266	195	27	3	2	<b>102</b>
<b>90</b>	266	193	28	1	0	
<b>95</b>	268	194	32	5	3	<b>103</b>
<b>105</b>	268	196	43	18	15	<b>108</b>
<b>115</b>	268	197	63	40	37	<b>114</b>
<b>125</b>	263	201	96	73	76	<b>122</b>
<b>135</b>	273	225	140	113	122	<b>131</b>
<b>145</b>	323	267	182	146	154	<b>130</b>
<b>155</b>	343	292	204	166	177	<b>106</b>
<b>165</b>	311	271	204	174	175	<b>63</b>
<b>175</b>	226	216	196	181	177	<b>19</b>
<b>180</b>	190	190	190	190	190	

<b>ZONAL LUMEN SUMMARY</b>		
<b>ZONE</b>	<b>LUMENS</b>	<b>%FIXT</b>
0-30	62	4.1
0-40	118	8.0
0-60	283	19.0
0-90	589	39.6
90-120	326	21.9
90-130	448	30.1
90-150	709	47.7
90-180	898	60.4
0-180	1488	100.0

**Dimming Notes:**

---

P300291-009-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls:**

---

Leviton 6672

Leviton 6674

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

# P300291-009-30