

Globe LED

Ceiling cord Mounted • Damp Location Listed PROGRESS LED



Description:

A distinctive classic globe pendant is accented by a striking metal brushed nickel cap. The cap holds a beautiful opal glass shade ready to emit gentle illumination. This versatile pendant can be displayed as a single fixture or in groups of two or more to create a custom lighting design for your home.

Specifications:

- Opal glass Globe
- The cap holds a beautiful opal glass shade ready to emit gentle illumination.
- A distinctive classic globe pendant is accented by a striking metal brushed nickel cap.
- This versatile pendant can be displayed as a single fixture or in groups of two or more to create a custom lighting design for your home.
- Ideal for any foyer, kitchen, or dining room.
- Perfect for mid-century modern, transitional, modern, or contemporary settings.
- Measures 11-5/8-inch width by 13-1/2-inch height.
- Uses one LED module (17w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.5 in W., 1 in ht., 5.5 in depth
- 1/8 IP Mounting Plate
- 120 in of wire supplied

Performance:

| | |
|---------------------|---|
| Number of Modules | 1 |
| Input Power | 17 W |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Source) | 1,276/73 (LM-82) |
| CCT | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 60000 (L70/TM-21) |
| EMI/RFI | FCC Title 47, Part 15, Class B |
| Warranty | 5-year Limited Warranty |
| Labels | cCSAus Damp Location Listed ENERGY STAR® qualified Meets California Title 24 JA8-2016 |


P500148-009-30



Dimensions:

Diameter: 11-5/8 in
Height: 13-1/2 in
Overall Ht. W/Cord: 136-1/2 in

Opal glass Globe
Width: 11-5/8 in
Height: 10-1/2 in

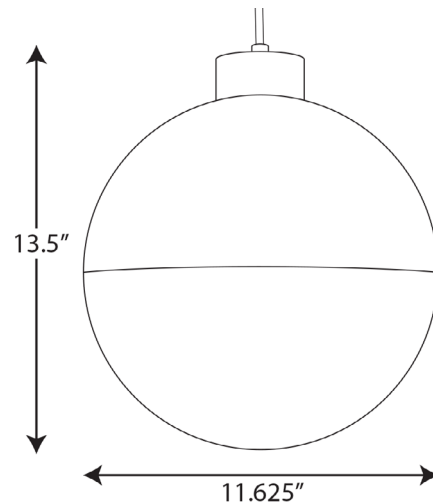

Photometrics:


P500148-009-30

| | |
|---|--------------------------------|
| ELECTRICAL DATA | P500148-009-30 |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| THD | <20% |
| EMI/RFI | FCC Title 47, Part 15, Class B |
| Operating Temperature | -30 °C to 30 °C |
| Dimming | Yes* |
| Over-voltage, over-current, short-circuit protected | |
| *See Dimming Notes for more information | |

P500148-009-30
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 415
 Fixture Efficacy: 44.6
 Spacing Criteria:

| CANDELA DISTRIBUTION | | |
|----------------------|---------|--------|
| DEG | CANDELA | LUMENS |
| 0 | 59.3 | |
| 5 | 59.4 | 6 |
| 15 | 59.5 | 17 |
| 25 | 58.8 | 27 |
| 35 | 57.5 | 36 |
| 45 | 55.1 | 43 |
| 55 | 51.9 | 47 |
| 65 | 47.8 | 47 |
| 75 | 42.7 | 45 |
| 85 | 37.8 | 41 |
| 90 | 34.5 | |
| 95 | 31.7 | 35 |
| 105 | 25.6 | 27 |
| 115 | 19.6 | 20 |
| 125 | 14.3 | 13 |
| 135 | 9.4 | 7 |
| 145 | 5.4 | 3 |
| 155 | 2.5 | 1 |
| 165 | 0.9 | 0 |
| 175 | 0.0 | 0 |
| 180 | 0.0 | |

| ZONAL LUMEN SUMMARY | | |
|---------------------|--------|-------|
| ZONE | LUMENS | %FIXT |
| 0-30 | 50 | 12.0 |
| 0-40 | 86 | 20.7 |
| 0-60 | 175 | 42.1 |
| 0-90 | 309 | 74.4 |
| 90-120 | 82 | 19.6 |
| 90-130 | 94 | 22.7 |
| 90-150 | 105 | 25.3 |
| 90-180 | 106 | 25.6 |
| 0-180 | 415 | 100.0 |

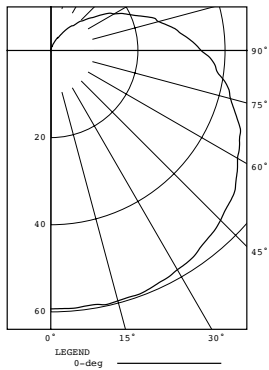

Test **18.00160** Test Date **02/14/18**

Dimming Notes:

P500148-009-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P500148-009-30