


Type _____
 -31
 P5230

Catalog No.	Finish	Lamping	Dimensions (Inches)	
	Black		A	B
P5230	-31	12v 50w MR16	3	5

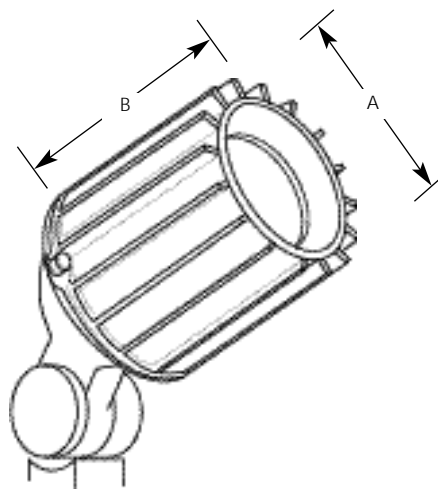

Specifications:

General

- Die cast aluminum construction
- External fins permit cooler operation of lamp
- Black powder coat paint
- Sealed clear lens
- Positive adjustment with locking screw for aiming
- Low voltage unit can be moved as needed for plant growth

Electrical

- 72" of wire furnished for connection to source
- Units must be wired to approved 12v transformer of proper capacity
- Recommend P8673-31R connectors or equal

Labeling

- UL-CUL wet location listed



Mounting

- Mounts on stake, landscape post or stem (order separately)
- 1/2 NPS thread

Type _____

P523031-KIT

Catalog No.	Finish Black	Lamping	Dimensions (Inches)	
			A	B
P523031-KIT	-	12v 50w MR16 (Included)	3	5

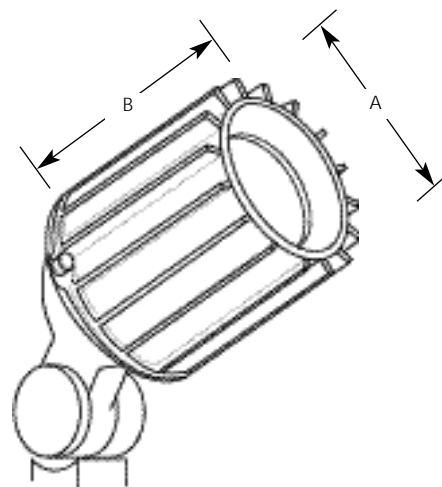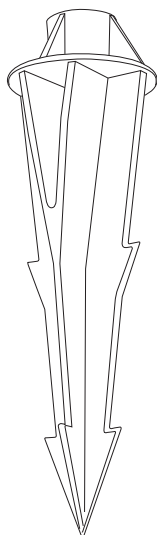

Specifications:

Kit Contents

- One P5230-31 spot light
- One P8618-31 stake
- One 50w MR16 bulb

P5230-31

- Die cast aluminum construction
- External fins permit cooler operations of lamp
- Black powder coat paint
- Sealed clear lens
- Positive locking screw aiming
- Low voltage – can be moved as needed for plant growth
- 36" of wire furnished for connection to source
- Unit must be wired to approved 12v transformer of proper capacity
- Recommend P8673-31R connectors or equal

- UL-CUL wet location listed

P8618-31

- Black ABS plastic – 2-1/2 in dia., 8-3/4 long
- _ NPS thread to mount P5230-31
- In ground mounting
- Wires feed through a hole in the center of the stake

50w MR16 Lamp

- Included in kit
- Bipin lamp
- Flood

Packed 24 per carton

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704

www.progresslighting.com