


Type _____
 -31
 P6802

Catalog No.	Finish			Dimensions (Inches)				
	Black	Lamping	Socket	A	B	C	D	E
P6802	-31	1-7w CF	G23	7-3/4	2-1/2	3-1/8	8-5/16	3-1/8

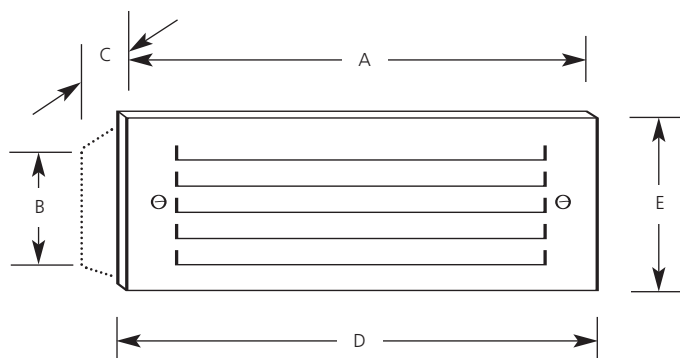

Specifications:

General

- Sized to replace standard brick dimensions
- Cast aluminum housing
- Stamped aluminum louvered face plate painted black
- White aluminum interior reflector
- Clear acrylic panel mounted behind the louver to provide a sealed unit

Mounting

- Recessed mounting in wood, brick, masonry, and poured concrete

Electrical

- 120 volt NPF ballast
- Minimum starting temperature - 0 degrees
- Three 1/2" I.P. conduit entries
- G23 compact fluorescent socket
- Can wire units in rows without need for separate outlet boxes
- Pre-wired

Labeling

- UL-CUL wet location listed