

P350072 LED Flush Mount Pendant/ceiling semi-flush mounted • Damp location listed



Description:

Designed for both commercial and residential interiors, Apogee is an energy efficient, high performance LED fixture. All fixtures feature 120-277V input with standard dimming. Etched glass shade provides an even and pleasing light effect. Apogee is 3000K, 90+ CRI and meets California Title 24 - JA8 - 2016 standards and is ENERGY STAR rated and damp location listed.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel construction Etched Glass shade
- Semi-flush fixture convertible to hanging pendant with included hardware and instructions
- Commercial-grade construction and performance
- Etched glass shade provides an even and pleasing light effect
- 120-277V operation, 0-10V compatible dimming
- 3000K color temperature, 90CRI
- 3850 lm, 60.2 Lum/Watt
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	63.5w
Input Voltage	120 -277 V
Input Frequency	60 Hz
Lumens/LPW	3850/57.3 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	54,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class A
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cETLus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

P350072-009-30

Images:



Dimensions:

Diameter: 27"
Height: 5-3/8"

Glass
Width: 24-1/2"
Height: 3-7/8"

Photometrics:

P350072-009-30

ELECTRICAL DATA	P350072-009-30
Input Voltage	120 -277 V
Input Frequency	60 Hz
Input Current	0.533 A
Input Power	63.5
Power Factor	≥0.90
THD	<20%
EMI Filtering	FCC Title 47, Part 15, Class A
Operating Temperature	-30 °C to 30°C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P350072-009-30


LED Light Engine: 3000 K 90 CRI CRI
 System Wattage: 63.5
 Fixture delivered lumens: 3850
 Fixture Efficacy: 57.3
 Spacing Criteria: 0.529

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	971	
5	967	92
15	937	265
25	880	406
35	797	499
45	690	532
55	562	503
65	421	417
75	283	300
85	166	183
90	120	
95	81	90
105	30	34
115	10	11
125	4	4
135	2	2
145	3	2
155	4	2
165	5	1
175	6	1
180	6	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	762	22.8
0-40	1261	37.7
0-60	2297	68.7
0-90	3196	95.6
90-120	135	4.0
90-130	138	4.1
90-150	142	4.2
90-180	146	4.4
0-180	3342	100.0

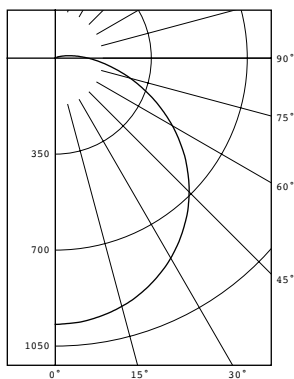

P350072-009-30

Dimming Notes:

P350072 is designed to be compatible with many 0-10V controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron - NFTV

Lutron - NTFTV

Lutron - DDTV

Leviton - AWSMT-7DW

Leviton - IP710

Lithonia ISD BC

Pass & Seymour - CD4FB

Wattstopper ADF-120277

Hunt Dimming - PS-010-120V

Hunt Dimming - PS010 277V

Lightolier Controls - MP1500FAM120

Lightolier Controls - ZP600FAM120

Synergy Lighting Controls - V2000FAMU

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.