



Brella™ Comfort Height®

Two-piece elongated 1.28 gpf chair height toilet
402095

Features

- Two-piece design.
- Elongated bowl offers added room and comfort.
- Skirted trapway simplifies cleaning.
- 1.28 gpf (4.8 lpf).
- Left-hand Polished Chrome trip lever.
- 2" (51 mm) fully glazed trapway.
- Combination consists of the 402101 bowl and 402098 tank.
- Patented ReadyLock™ installation system is a simple solution for skirted toilets that saves time, hassle, and eliminates the need to drill into the floor for a standard 12" (305 mm) rough-in.
- Standard 12" (305 mm) rough-in only. Cannot be combined with K-5383, or K-5381 for use in 10" or 14" installations.

Material

- Vitreous china.

Technology

- Uses the force of gravity and a precision-engineered tank, bowl, and trapway to deliver virtually plug-free performance.

Installation

- Standard 12" (305 mm) rough-in.
- Seat and supply line sold separately.

Recommended Products/Accessories

K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat
K-7637 Angle Supply with Stop (single)
K-23726 Drain treatment


Included Components

Product consists of:

402098 Toilet tank
402101 Elongated toilet bowl

Additional Components:

ReadyLock™ installation system
Tank cover
Trip lever

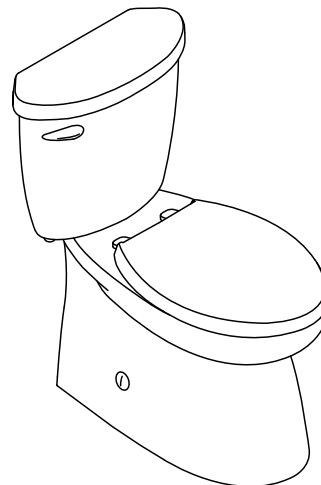

ADA CSA B651 OBC

Codes/Standards

DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

■ 0 White

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

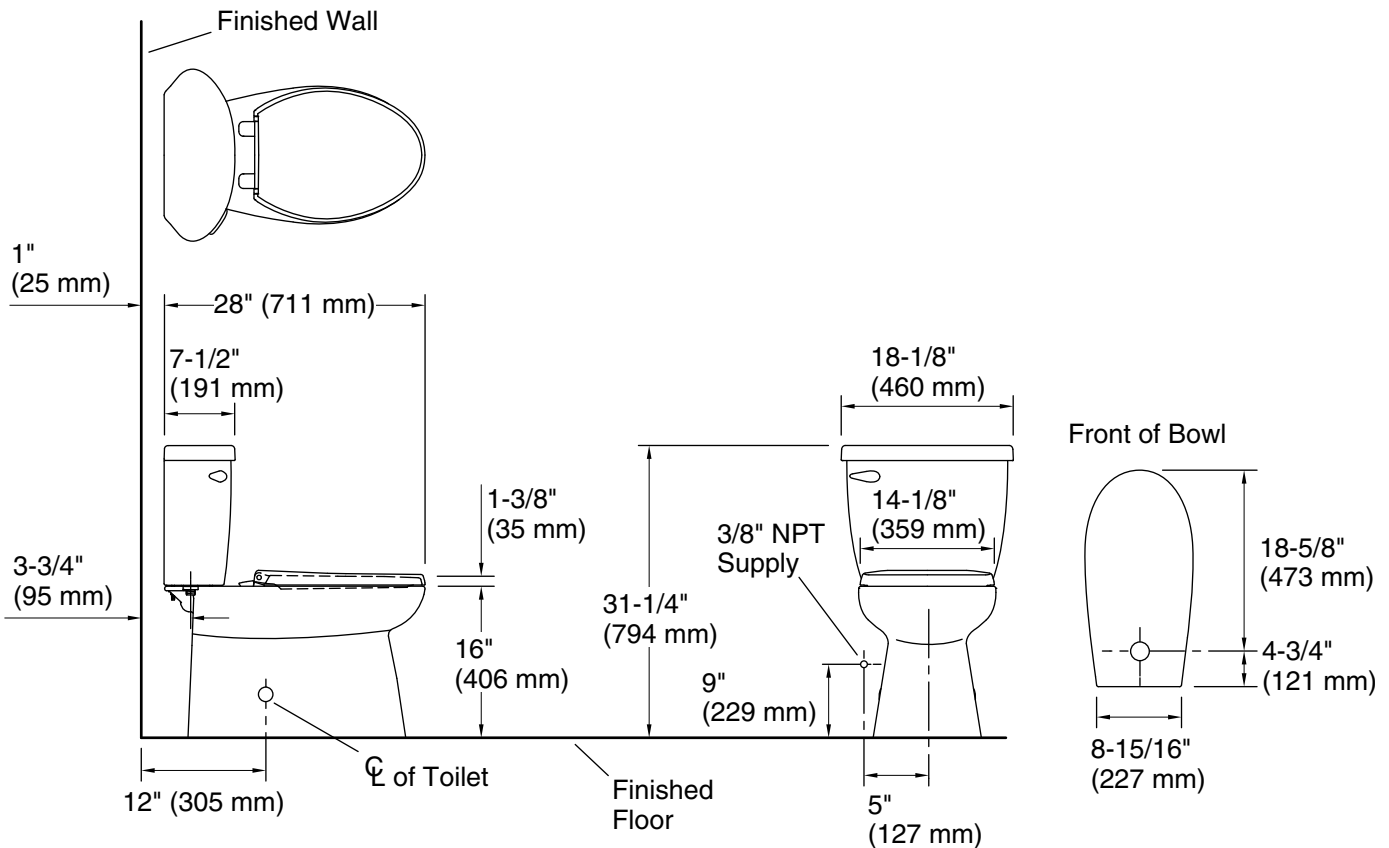

Technical Information

All product dimensions are nominal.

Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Trap passageway:	2" (51 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	5-1/16" x 4-9/16" (129 mm x 115 mm)
Rim to water surface:	8-9/16" (217 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Fixture Supply Requirements

Min static pressure:	15 psi (103.4 kPa)
Max static pressure:	80 psi (551.6 kPa)

Notes

- Install this product according to the installation instructions.
- ADA compliance will require a seat 1-inch thick minimum.
- ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
- Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.
- Accessibility standards may require controls to be located on the open side of the toilet.