



# Windham™

Two-piece elongated toilet, 1.6 gpf  
**402324-WTL**

## Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Standard height
- 1.6 gpf (6.0 lpf)
- Color-matched left-hand white trip lever included
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of 403217 bowl and 402363-WTL tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

## Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

## Recommended Products/Accessories

K-4774 Brevia™ Quick-Release™ elongated toilet seat

## Included Components

402363-WTL Toilet tank, 1.6 gpf  
403217 Elongated toilet bowl



## Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
IAPMO Certification


## STERLING® Toilet Limited Warranty


See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
---	---	-------

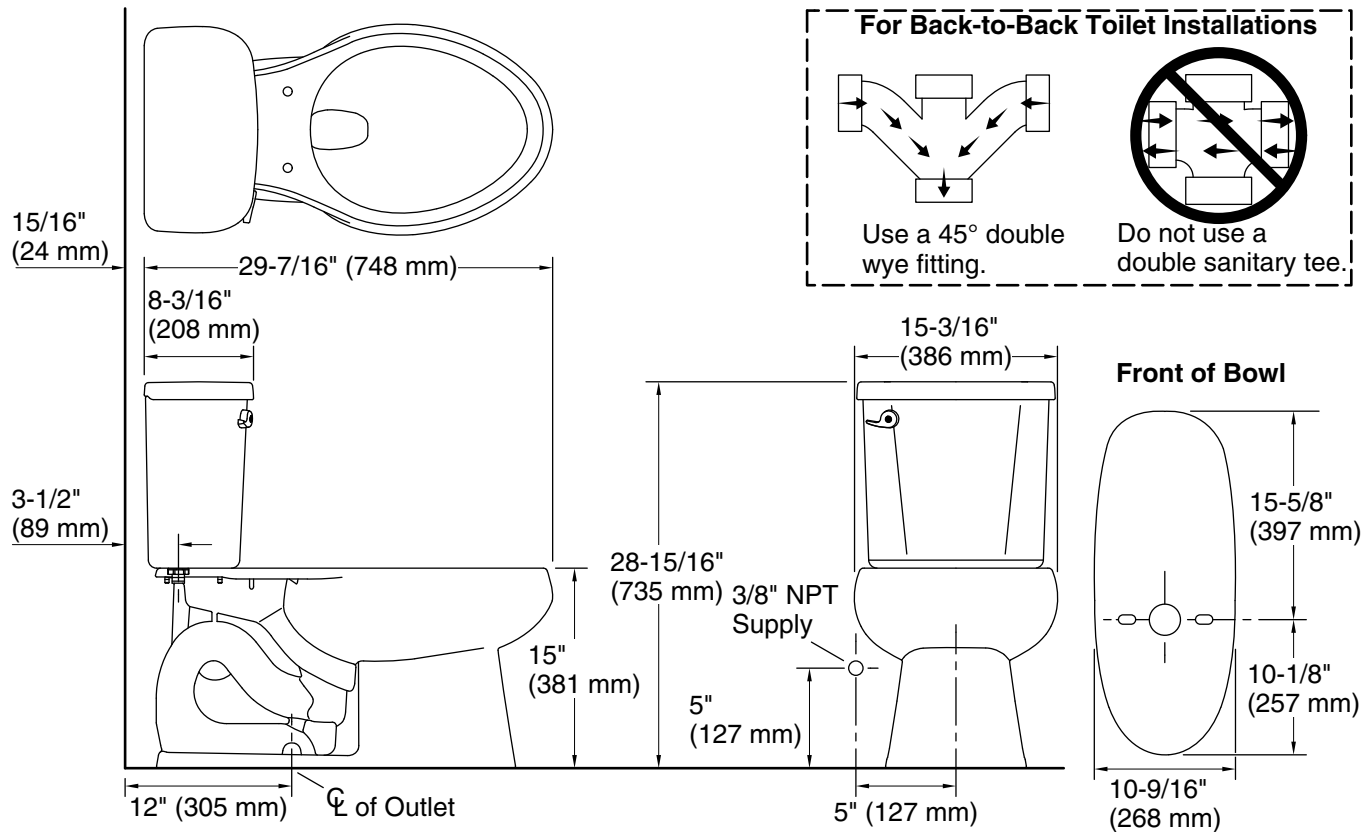

### Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Flush type:	ProForce Plus
Trap passageway:	2-1/8" (54 mm)
Rim to water surface:	6-9/16" (167 mm)
Rough-in:	12" (305 mm)

### Fixture Supply Requirements

Min static pressure:	20 psi (137.9 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	15 psi (103.4 kPa)
Min flow rate:	1 gpm (3.8 lpm)

### Notes

Install this product according to the installation instructions.