



# Deluxe

## 65-1/2" H sliding shower door with 1/8"-thick glass

### 572113-G10

#### Features

- Reversible top track and towel bar allow a choice between rounded or accented design
- Tempered glass ensures enhanced safety and durability
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning

#### Material

- Framed, 1/8" (3 mm) thick Pebbled tempered glass
- Anodized aluminum prevents rust and corrosion

#### Installation


- Fits opening widths 54-3/8" - 59-3/8" (1381 - 1508 mm)
- 65-1/2" (1664 mm) high, with 63-5/16" (1608 mm) minimum head clearance
- 3/8" (10-mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality

#### Recommended Products/Accessories

K-23723 Faucet cleaner

#### Included Components

Additional Components:  
Hardware kit

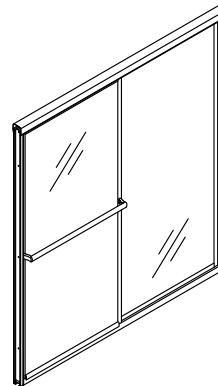

#### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

#### STERLING® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

##### Color Code Description




N Nickel

#### Available Glass Options

##### Code Description

G10 Pebbled

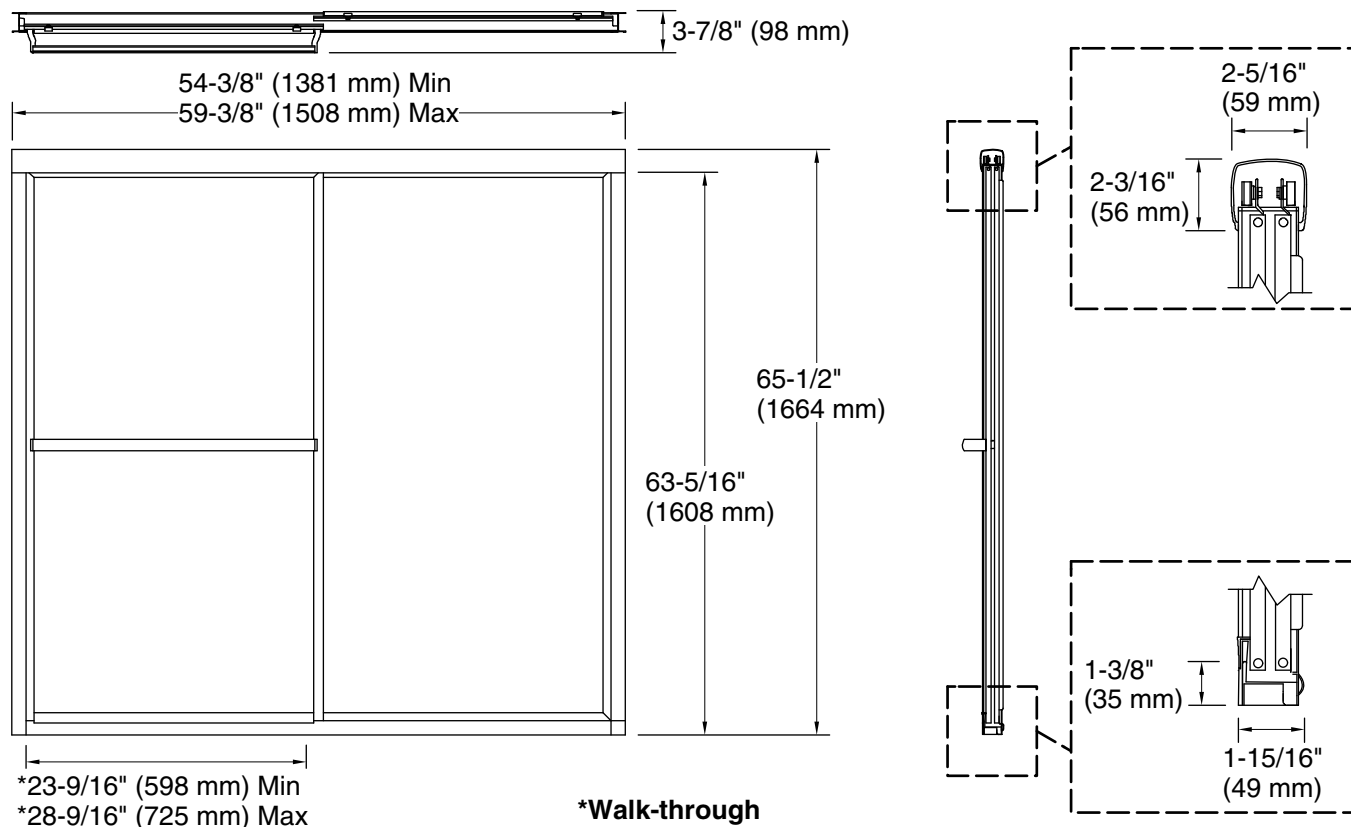

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 54-3/8" (1381 mm)  
 Min:

Opening Width - 59-3/8" (1508 mm)  
 Max:

Walk-through - Min: 23-9/16" (598 mm)

Walk-through - Max: 28-9/16" (725 mm)

Base-To-Wall 1/2" (13 mm)

Radius - Max:

Glass thickness: 1/8" (3 mm)

### Notes

The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.